
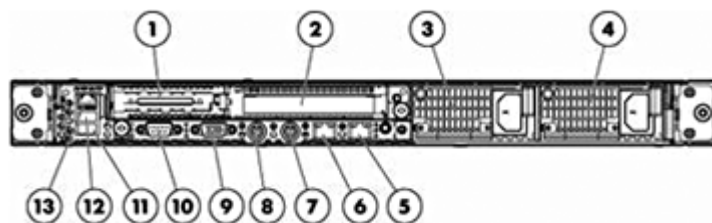


Overview

HP ProLiant DL360 Generation 5 (G5)

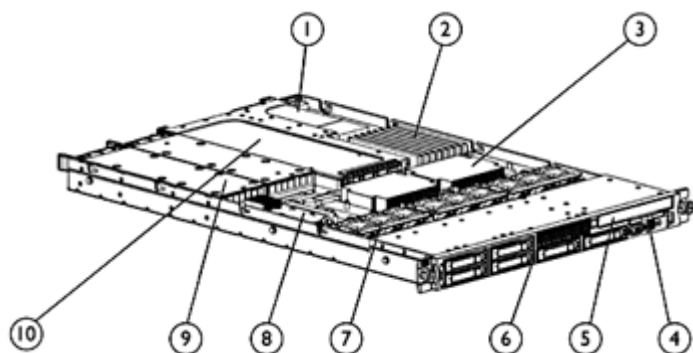

Front View:

1. Low-profile x8 PCI-Express slot
2. Eight PC2-5300 FB-DIMMs (DDR2 667) slots
3. Up to two Intel Quad-Core or Dual-Core Xeon™ processors
4. Slide-out System Insight Display
5. Slimline removable media bay
6. Up to six SAS/SATA hot plug drive bays
7. Removable fans for easy serviceability
8. Choice of Smart Array P400i Controller or Smart Array E200i Controller
9. Redundant Hot Plug Power Supplies (upgradeable option)
10. Full length/height x8 PCI-Express Slot (optional PCI-X)

Rear View:

1. PCI Express expansion slot 1, low-profile, half-length
2. PCI Express expansion slot 2
3. Power supply bay 2
4. Power supply bay 1
5. NIC 2 connector
6. NIC 1 connector
7. Keyboard connector
8. Mouse connector
9. Video connector
10. Serial connector
11. USB connector
12. USB connector
13. iLO 2 NIC connector

What's New

- New Quad-Core Intel Xeon 5300 sequence processor models are now available with up to 1333MHz Front Side Bus speed, with 8M (2x4MB) L2 Cache (X5355 120W, E5345 80W, E5335 80W, L5320 50W)

At A Glance

Combining concentrated 1U compute power, integrated Lights-Out management, and essential fault tolerance, the DL360 is optimized for space constrained installations. Dual-core Xeon processors, DDR2 Fully Buffered DIMMs, Serial Attached SCSI (SAS) and PCI Express technology provide a high performance system ideal for the full range of scale out applications. What's more, the HP ProLiant DL360 G5 steps up the fault tolerant in an ultra dense platform with redundant power, redundant fans, mirrored memory or online spare memory, embedded RAID capability, and full-featured remote Lights-Out management.

- **Processors:**
 - Up to (2) Quad-Core or Dual-Core Intel® Xeon® processor 5000 sequence
 - Up to (2) Quad-Core Intel Xeon processor 5300 sequence
 - Intel 5000P chipset supporting up to a 1333MHz front-side bus
- **Memory:**
 - Up to 32 GB of memory, supported by (8) slots of PC2-5300 Fully Buffered DIMMs (DDR2-667); 4:1 interleaving; memory mirroring; online spare
- **Storage Controller:**
 - Performance Models: HP Smart Array P400i/256MB BBWC Controller (RAID 0/1/1+0/5/6) (512MB BBWC optional)

- Base Models: HP Smart Array P400i/256MB Controller (RAID 0/1/1+0/5) (512MB BBWC optional)
- Entry Models: HP Smart Array E200i/64MB Controller (RAID 0/1/1+0) (128MB BBWC optional)
- **Internal Drive Support:**
 - Up to (6) small form factor (SFF) hot-plug drive bays
 - Slimline media bay supporting DVD, CD or Floppy drive
- **Network Controller:**
 - Two embedded NC373i Multifunction Gigabit Network Adapters with TCP/IP Offload Engine, including support for Accelerated iSCSI through an optional Licensing Kit
- **Expansion Slots:**
 - Two PCI-Express expansion slots: (1) full-length, full-height slot; (1) low-profile slot
- **USB 2.0 Ports:**
 - 4 Total: (1) front, (1) internal and (2) rear accessible ports
- **Redundancy:**
 - Multiple layers of fault tolerance through critical component redundancy (power supply and fan redundancy), mirrored memory, embedded RAID capability, and full-featured remote Lights-Out management
- **Management:**
 - Integrated Lights-Out 2 featuring Integrated Remote Console with KVM over IP performance over shared network access
 - HP Power Meter and Power Regulator for ProLiant, delivering integrated power monitoring and server level, policy based power management with industry leading energy efficiency and savings on system power and cooling costs
 - Convenient slide-out Systems Insight Display for quick and easy front view server diagnostics
 - ProLiant Essential Foundation Pack standard, including HP Systems Insight Manager, SmartStart, SmartStart Scripting Toolkit, Subscriber's Choice and ROM Based Setup Utility (RBSU)
 - Automatic Server Recovery (ASR), ROM Based Setup Utility (RBSU), HP System Insight Manager, Status LEDs including system health, UID, and SmartStart
- **Form Factor:**
 - 1U Rack form factor (1.75"), less than 28 inches (70.5 cm) deep
- **Deployment/Serviceability:**
 - Sliding rails for in rack servicing ship standard; optional 1U Cable Management Arm
- **Warranty:**
 - Protected by HP Services and a worldwide network of resellers and service providers. Three-year next business day, on-site limited global warranty. Certain restrictions and exclusions apply. Pre-failure notification on processors, memory, and SAS hard drives. SATA hard drives have a one-year warranty.

[Overview](#)
[Standard Features](#)
[Models](#)
[Configuration Information - Factory Integrated Models \(North America only\)](#)
[Options](#)
[Memory](#)
[Storage](#)
[Power Specifications](#)
[Technical Specifications](#)

Standard Features

NOTE: For a brief, printer friendly data sheet that describes this product and informs you of the essential capabilities and specifications, please visit: <http://h71028.www7.hp.com/ERC/downloads/4AA0-6375ENW.pdf>.

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information – Factory Integrated Models" section.

Processor

One of the following depending on Model

Quad-Core Intel Xeon Processor X5355 (2.66 GHz, 120 Watts, 1333 Front Side Bus (FSB))
 Quad-Core Intel Xeon Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB)
 Quad-Core Intel Xeon Processor E5320 (1.86 GHz 80 Watts, 1066 FSB)
 Quad-Core Intel Xeon Processor L5320 (1.86 GHz 50 Watts, 1066 FSB)
 Quad-Core Intel Xeon Processor E5310 (1.60 GHz 80 Watts, 1066 FSB)
 Dual-Core Intel Xeon Processor 5160 (3.0 GHz, 80 Watts, 1333 FSB)
 Dual-Core Intel Xeon Processor 5150 (2.67 GHz, 65 Watts, 1333 FSB)
 Dual-Core Intel Xeon Processor 5148 (2.33 GHz, 40 Watts, 1333 FSB, Low Voltage)
 Dual-Core Intel Xeon Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB)
 Dual-Core Intel Xeon Processor 5130 (2.0 GHz, 65 Watts, 1333 FSB)
 Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB)
 Dual-Core Intel Xeon Processor 5110 (1.6 GHz, 65 Watts, 1066 FSB)

NOTE: Up to 2 processors supported. Performance configurations include two processors.

NOTE: Intel 5300 sequence processors are 64-bit, Quad-Core, and supports Intel VT technology. Intel 5100/5000 sequence processors are 64-bit, Dual-Core, and supports Intel VT technology.

Cache Memory
One of the following depending on Model

8MB (2 x 4MB) Level 2 cache (5300 sequence)
4MB (1 x 4MB) Level 2 cache (5100 sequence)
4MB (2 x 2MB) Level 2 cache (5000 sequence)

Upgradeability

Upgradeable to quad or dual processing
Future upgradeable to Xeon Series 5300 Quad-Core, or 5100 Dual-Core processors (Please contact your regional sales support to determine quad core upgradeability. Some of the earlier shipping models may not support this upgrade)

Chipset

Intel 5000P chipset
NOTE: For more information regarding Intel chipsets, please see the following URL:
<http://www.intel.com/products/server/chipsets/>.

Memory Protection & Functionality

Advanced ECC (multi-bit error protection), Online Spare, Mirroring
4-way interleaving

Memory

Type PC2-5300 Fully Buffered DIMMs (DDR2-667)
Standard (Entry or Base Models) 1 GB (2 x 512 MB)
Standard (Performance Models) 2 GB (2 x 1 GB)
Standard (Performance Model E5345) 4 GB (4 x 1 GB)
Maximum 32 GB (8 x 4 GB)
NOTE: Memory DIMMs in systems with the Front Side Bus (FSB) running at 1333 MHz will run at 667 MHz and in systems with a FSB running at 1066 MHz or 667 MHz the memory DIMMs will run at 533 MHz.

Network Controller

Two embedded NC373i Multifunction Gigabit Network Adapters with TCP/IP Offload Engine, including support for Accelerated iSCSI through an optional Licensing Kit

| Expansion Slots | Slot Number | Bus Speed | Bus Number* | Device Number** | Hot Plug | PCI Voltage |
|-----------------|-------------|------------------------------|-------------|-----------------|----------|-------------|
| | 1 | x8 PCI Express | 11 | 0 | no | N/A |
| | 2 | x8 PCI Express | 19 | 0 | no | N/A |
| | 2 | 64-bit/133MHz PCI-X (option) | 16 | 1 | no | 3.3 Volt |

***NOTE:** Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

****NOTE:** Slots are enumerated differently based on OS. Microsoft OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

Storage Controller
One of the following depending on Model

Performance Models: HP Smart Array P400i/256MB BBWC Controller (RAID 0/1/1+0/5/6)
Available upgrades: 512MB memory battery-backed write cache (BBWC) module for RAID 0/1/1+0/5/6.

Base Models: HP Smart Array P400i/256MB Controller (RAID 0/1/1+0/5)
Available upgrades: 512MB memory battery for battery-backed write cache (BBWC) module for RAID 0/1/1+0/5/6, or battery-backed write cache for RAID 0/1/1+0/5/6.

Entry Models: HP Smart Array E200i/64MB Controller (RAID 0/1/1+0)
Available upgrades: 128MB memory battery for battery-backed write cache (BBWC) module for RAID 0/1/1+0/5.

Storage

Optical Drives (Slimline Drive bay) Optional DVD-ROM, DVD/CD-RW Combo (standard in performance models), DVD-RW, or Slimline floppy drive
Drive Bays Up to 6 Small Form Factor bays total

NOTE: 4 bays active in most models. Smart Array P400i controller and Mini-SAS storage cable (P/N 399546-B21) required for activation of 5th and 6th drive bays.

| | | | |
|---|---|---|----------------|
| Maximum Internal Storage Type | Hot Plug Serial Attached SCSI (SAS) | 876GB SAS | 6 x 146GB SAS |
| | Hot Plug Serial ATA (SATA) | 720GB SATA | 6 x 120GB SATA |
| Interfaces | Keyboard | 1 | |
| | Mouse | 1 | |
| | Serial | 1 | |
| | Video | 1 | |
| | USB 2.0 Ports | 4 total: 2 rear, 1 front, 1 internal | |
| | | NOTE: Please see the following URL for additional information regarding USB support: http://h18004.www1.hp.com/products/servers/platforms/usb-support.html . | |
| | Network RJ-45 | 2 | |
| iLO 2 remote management port | 1 | | |
| Graphics | Integrated ATI ES1000 1280 x 1024 x 16M color (32MB video standard) | | |
| Form Factor | Rack (1U), (1.75 in/4.45 cm); 27.75 inch depth (70.5cm) | | |
| ProLiant Essentials Foundation Pack Software | HP Systems Insight Manager | HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible environment to centrally manage servers, storage and other infrastructure devices across multiple operating system platforms. | |
| | | <p>Through a single management view, HP SIM provides core management services that include device discovery and identification, event views, health monitoring, inventory data collection, software version control and reporting. HP SIM is built on industry standards and is extensible with value-added ProLiant Essentials, Integrity Essentials and Storage Essentials software to meet individual management needs. For more details on HP SIM visit http://www.hp.com/go/hpsim.</p> <p>HP SIM provides organizations with the following benefits:</p> <ul style="list-style-type: none"> • Simplifies and consolidates infrastructure lifecycle management using task and query based functionality • Provides the foundation for infrastructure automation and virtualization • Enables IT management based on business processes not hardware platforms • Lowers infrastructure maintenance cost and frees resources for innovation • Maximizes resource utilization with virtualization technologies • Provides a central point of integration between infrastructure and Enterprise management tools such as HP OpenView | |
| | SmartStart | SmartStart is a tool that simplifies server setup, providing a rapid way to deploy reliable and consistent server configurations. For more information, please visit the SmartStart Web site at http://www.hp.com/servers/smartstart . SmartStart version supported (minimum): SmartStart 7.60. | |
| | Insight Management Agents | Insight Management Agents should be installed on all HP servers to present system instrumentation, health and configuration information into HP Systems Insight Manager and the HP System Management | |

Homepage. The HP System Management Homepage aggregates systems data from Insight Management Agents and other HP management tools, providing a consolidated browser-based interface for managing individual servers,

Insight Management Agents and The HP System Management Homepage are included on ProLiant Support Packs, and can also be installed using the server profiles provided with the ProLiant Essentials Rapid Deployment Pack. For additional information about the Management Agents and the HP System Management Homepage please visit the management Web site at <http://www.hp.com/servers/manage>.

| | |
|---|---|
| Subscriber's Choice | Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides automatic delivery of software and driver change notifications for ProLiant products. Sign up at http://www.hp.com/go/subscriberschoice and customize your profile to receive various new alerts as they become available, on a weekly or monthly basis. |
| ROMPaq, support software, and configuration utilities | The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options available in SmartStart or downloadable from Software and Drivers download pages: http://www.hp.com/go/support |
| Insight Diagnostics | The most advanced configuration analysis, reporting and troubleshooting utilities used by HP and at your fingertips, available in SmartStart. |
| Optional ProLiant Essentials Value Packs | Optional software offerings that selectively extend the functionality of an Adaptive Infrastructure to address specific business problems and needs: |

- **Insight Control Environment** - is based on HP Systems Insight Manager and ProLiant Essentials software, and brings the value of Insight Control to ProLiant customers by delivering comprehensive health and performance monitoring, remote control, vulnerability scanning and patch management as well as flexible deployment and power management through an integrated installation package and streamlined licensing. For more information, visit: <http://www.hp.com/go/ice>
- **Accelerated iSCSI Pack** - enables the embedded Multifunction network controller to serve as both a NIC and an iSCSI HBA providing access to SAN storage over the same connection used for networking. Processing of the protocol stack is offloaded to the NIC reducing CPU utilization and greatly improving the speed with which the requests are processed and sent to the network.
- **Rapid Deployment Pack (RDP)** is an automated deployment and provisioning solution for all ProLiant servers. RDP includes the ProLiant Integration Module featuring ProLiant server pre-configured events for OS installation, and optimized software drivers, firmware and management agents. Every RDP disc includes 7-day, 10-node trial licenses for evaluation purposes. RDP requires a license for each server deployed and is available for purchase with HP servers. For more information, visit: <http://www.hp.com/servers/rdp>.
- **Server Migration Pack** - The Server Migration Pack automates the manual processes required for migrating servers between physical or virtual platforms (P2V, V2P, and V2V).
- **Server Migration Pack** - P2P Edition: Upgrading or replacing your existing server? Effortlessly transition to new servers with automated, accurate and affordable migration of OS, application and data.
- **Performance Management Pack** (offered exclusively through the Insight Control suites) - a performance management

solution that identifies and explains hardware performance bottlenecks on ProLiant servers and attached options enabling users to better utilize their valuable resources.

- **Virtual Machine Management Pack** - provides central management and control of virtual machines from Microsoft and VMware. Integrated approach provides the ability to manage both physical and virtual resources from a single management console
- **Vulnerability and Patch Management Pack** (offered exclusively through the Insight Control suites) - identifies and remediates software security vulnerabilities due to missing patches as well operating system configurations that can be exploited by viruses, worms, and other blended threats.
- **Optional Remote Management Packs**
- **Integrated Lights-Out Advanced Pack** - upgrades the iLO 2 processor with comprehensive remote control including Virtual KVM remote graphical console, enhanced console sharing and replay, virtual media (floppy, CD/DVD, USB key), virtual folders, historical power reporting, power capping and enterprise security (directory services and two-factor authentication).
- **Integrated Lights-Out Select Pack** - upgrades the iLO 2 processor with enhanced console sharing and replay, virtual media (floppy, CD/DVD, USB key), virtual folders, historical power reporting, power capping and enterprise security (directory services and two-factor authentication) for servers managed using remote consoles available in iLO 2 Standard and iLO 2 Standard Blade Edition.
- **Insight Power Manager (IPM)** - upgrades the single-server remote management capabilities of iLO Select/Advanced to include centralized reporting and policy-based management of power consumption and thermal output provided by the Insight Power Manager. IPM unifies all of this functionality within a single user interface - HP Systems Insight Manager.

NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: <http://www.hp.com/servers/proliantessential>.

Industry Standard Compliance

ACPI 2.0b Compliant
 PCI 2.2 Compliant
 WOL Support
 Microsoft® Logo certifications
 PXE Support
 USB 1.1 and 2.0 Compliant

Remote Management Integrated Lights-Out (iLO 2) Management 2

- Virtual Text Remote Console (pre-OS only)
- Remote Serial Console
- Virtual Power Button Control
- Virtual Unit ID control
- Integrated Remote Console (ActiveX Control client)
- Dedicated & full function shared network connectivity with VLAN
- Embedded system health
- Present power consumption
- Browser, command line and scripted access
- Automatic IP Configuration via DHCP/DNS/WINS
- Industry Standard 128-bit Secure Sockets Layer (SSL) and Secure Shell security (SSH)

- Advanced Encryption Standard (AES)/Triple Data Encryption Standard (3DES)
- OS independent hardware health status
- IML and iLO Event Logging
- Support for 12 user accounts with customizable access privilege

Intelligent Manageability

HP Systems Insight Manager
 SmartStart
 ROM-Based Setup Utility (RBSU)
 Remote-Flash Redundant ROM
 Integrated Management Log (IML)
 Server Health logging
 Automatic Server Recovery-2 (ASR-2)
 System Insight Display (SID)
 Dynamic sector repairing and drive parameter tracking (with Smart Array controllers)
 Hot Spare Boot
NOTE: Upon the event of a failed processor or VRM in a multi-processing environment, the system will automatically reboot and use the remaining good processor(s).
 Power Down Utility
 Pre-Failure Warranty (covers processors, as well as SAS hard drives and memory)

Security

Power-on password
 Keyboard password
 Diskette drive control
 Diskette boot control
 QuickLock, Network Server Mode
 Removable CD and Diskette Drive Assembly
 Serial interface control
 Administrator's password
 Integrated Lights-Out has 12 customizable user accounts and SSL encryption
 Integrated Lights-Out can be disabled via a Global Setting
 iLO Advance Pack supports directory services integration and two-factor authentication

Server Power Cords

High voltage power cord ships standard with all part numbers. Localized cables included with geographic specific models in other world regions.
NOTE: ProLiant DL servers no longer ship standard with NEMA power cords (187335-001) that allow connection to 110V US wall outlets in a home or office. ProLiant DL servers are primarily connected to PDU's in data center racks so they now ship standard with only a PDU power cord (416151-B21). If a user wishes to power a ProLiant DL server using a 110V receptacle (NEMA-15), the above NEMA power cord must be ordered separately.

UPS Power Cord Matrix

Please see the UPS Power Cord Matrix for cable descriptions, requirements, and specifications for UPS units:
<ftp://ftp.compaq.com/pub/products/servers/proliantstorage/power-protection/powercordmatrix.pdf>.

Power Supply

700W, Optional (1+ 1 redundant) power supply
NOTE:PN 399542-B21 contains the optional power supply and an IEC power cable only; purchase if connecting to PDU/UPS that supports IEC cables. PN 399542-291 includes IEC power cable and a Japan power cable.

System Fans

9 fans ship standard; N+1 fan redundancy standard

Required Cabling

For required cabling information, refer to the Web site at <http://h18000.www1.hp.com/products/servers/proliantdl360/>.

OS Support

Microsoft Windows 2000 Server
 Microsoft Windows Server 2003
 Novell NetWare
 Red Hat Enterprise Linux
 SUSE Linux Enterprise Server
 Solaris 10 32/64-bit
 VMware Virtualization Software

NOTE: SAS and SATA models may have different OS support. Please see OS Support Matrix.

NOTE: For a more complete and up-to-date listing of supported OSs and versions, please visit our OS Support Matrix page at: <http://www.hp.com/go/supportos>.

NOTE: For more complete and up-to-date information on how to buy server operating systems from HP please visit the OS product site at:

<http://h18004.www1.hp.com/products/servers/software/OEM.html>

NOTE: For a listing of the latest drivers available for the HP ProLiant DL360, please see:

<http://h18023.www1.hp.com/support/files/server/us/index.html>.

NOTE: For more Linux OS support & certification information, please visit our the ProLiant & BladeSystem Server Linux matrix:

<http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html>

NOTE: For more information on HP's Certified and Supported ProLiant Servers, please visit the VMware Server Support Matrix at:

<http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html>.

Rack Airflow Requirements

Rack 10000 series Cabinets

The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The 10000 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors.

CAUTION: If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment:

- **Front and rear doors:** If your 42U server rack includes closing front and rear doors, you must allow 830 square inches (5,350 sq cm) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation).
- **Side:** The clearance between the installed rack component and the side panels of the rack must be a minimum of 2.75 inches (7 cm).

CAUTION: Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels results in improper cooling that can lead to thermal damage.

NOTE: For additional information, refer to the Setup and Installation Guide or the Documentation CD provided with the server, or to the server documentation located in the Support section at the following URL:

<http://h18000.www1.hp.com/products/servers/proliantdl360/index.html>.

Rack Kit

The HP ProLiant DL360 quick deploy rail system provides tool-free support for racks with square or round mounting holes (including Compaq/HP 7000*, 9000, 10000 and HP series) with an adjustment range to fit a rack depth of 21.25" to 37.75".

Rack Kit

The HP ProLiant DL360 quick deploy rail system provides tool-free support for racks with square or round mounting holes (including Compaq/HP 7000*, 9000, 10000 and HP series) with an adjustment range to fit a rack depth of 21.25" to 37.75".

Telco Rack Support

HP ProLiant DL360 G5 Telco Rack Kit:

Support for all 2-post Telco racks requires the use of the standard rack kit and an additional option kit from Rack Solutions (<http://www.racksolutions.com/hp/>)

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to <http://www.hp.com/go/factory-express>.

HP Enterprise Configurator

The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.

<http://www.hp.com/products/configurator>

HP ProLiant Smart Buys (NA only)

The HP Smart Buy program offers mainstream business solutions at competitive prices with excellent availability and superior HP quality. It offers a wide range of industry-leading HP products at compelling prices, allowing you to receive richer configurations with additional options.

NOTE: ProLiant Smart Buys are available in North America only. For detailed specification information on ProLiant Smart Buys please click on the following link:

<ftp://ftp.compaq.com/pub/products/servers/smartbuys.pdf>

Service and Support

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of resellers and service providers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Additional support may be covered under the warranty or available for an additional fee. Enhancements to warranty services are available through HP Care Pack services or customized service agreements.

NOTE: Server Warranty includes 3 year Parts, 3 year Labor, 3-year on-site support. Additional information regarding worldwide limited warranty and technical support is available at:

<http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

HP Care Pack services include coverage for the HP branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as 22" and smaller external monitors and tower UPS options up to 3kVA; these items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

HP services provide continuous care and support expertise with committed response designed to meet your IT and business needs.

To fully capitalizing on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions provides a range of support services designed to meet the varying needs of business. Whether an SMB or large global corporation HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

Enhanced Care – Minimum recommended service support offer designed to ensure customers have access to expert assistance, whenever they need it.

- *4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years*

Continuous Care – Recommended service delivering cost-effective support options designed to extend HP Services committed response and guaranteed fix times, designed to speed problem identification and resolution.

- *6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years*

Total Care – Highest HP Support service level recommend to help increase IT performance and availability with comprehensive, integrated hardware and software services

- *Support Plus 24 – Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays*

Deployment Services – HP Installation and Start Up services designed to take time, risk, and

worry out of the deployment of ProLiant servers – and free customers IT support staff to focus on what they do best, their business.

- *Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays*

NOTE: For a complete listing of service offerings and information visit:

<http://www.hp.com/services/proliantservices>

<http://www.hp.com/go/proliant/carepack>

[Overview](#) [Standard Features](#) [Models](#) [Configuration Information - Factory Integrated Models \(North America only\)](#) [Options](#) [Memory](#) [Storage](#) [Power Specifications](#) [Technical Specifications](#)

Models

NOTE: ProLiant Smart Buys are available in NA only. For detailed specification information on ProLiant Smart Buys please click on the following link: <ftp://ftp.compaq.com/pub/products/servers/smartbuys.pdf>.

Models

| | | |
|--|--|---|
| <p>HP DL360 G5 Performance Models</p> <p>Quad-Core Models DL360R05 E5345 4GB 435944-xx1</p> | <p>Processor(s) Two of the following depending on Model</p> | <p>(2) Quad-Core Intel Xeon E5345 Processor (2.33 GHz, 80 Watts, 1333 FSB) (2) Dual-Core Intel Xeon 5160 Processor (3.00 GHz, 80 Watts, 1333 FSB) (2) Dual-Core Intel Xeon 5150 Processor (2.66 GHz, 65 Watts, 1333 FSB)</p> |
| <p>Dual-Core Models DL360R05 5160 2GB 416566-xx1 DL360R05 5150 2GB 416564-xx1</p> | <p>Cache Memory One of the following depending on Model</p> | <p>Quad-Core: 8MB (2 x 4MB) Level 2 cache; Intel Xeon Processor 5300 Sequence Dual-Core: 4MB (1 x 4MB) Level 2 cache; Intel Xeon Processor 5100 Sequence</p> |
| | <p>Memory One of the following depending on Model</p> | <p>2 GB (2 x 1 GB) Standard; PC2-5300 Fully Buffered DIMMs (DDR2-667) 4 GB (4 x 1 GB) Standard; PC2-5300 Fully Buffered DIMMs (DDR2-667)</p> |
| | <p>Network Controller</p> | <p>Two embedded NC373i Multifunction Gigabit Server Adapters</p> |
| | <p>Storage Controller</p> | <p>HP Smart Array P400i/256MB BBWC Controller (RAID 0/1/1+0/5/6)</p> |
| | <p>Hard Drive</p> | <p>No drives included; (6) drive bays active</p> |
| | <p>Internal Storage</p> | <p>876GB SAS; 720GB SATA</p> |
| | <p>Optical Drive</p> | <p>Slimline DVD/CD-RW Combo drive</p> |
| | <p>PCI-Express Slots</p> | <p>1 full-length x8 PCI-Express slot 1 low-profile x8 PCI-Express slot</p> |
| | <p>Power Supplies</p> | <p>(2) 700W power supplies, redundant</p> |
| | <p>Fans</p> | <p>9 total, redundancy standard</p> |
| | <p>Form Factor</p> | <p>Rack (1U), (1.75 in/4.45 cm); 27.75 inch depth (70.5cm)</p> |
| <p>HP DL360 G5 Base Models</p> <p>Quad-Core Models DL360R05 E5335 2GB 435943-xx1 DL360R05 E5320 1GB 438313-xx1</p> | <p>Processor(s) One of the following depending on Model</p> | <p>(1) Quad-Core Intel Xeon E5335 Processor (2.00 GHz, 80 Watts, 1333 FSB) (1) Quad-Core Intel Xeon E5320 Processor (1.86 GHz, 80 Watts, 1066 FSB) (1) Dual-Core Intel Xeon 5160 Processor (3.00 GHz, 80 Watts, 1333 FSB) (1) Dual-Core Intel Xeon 5150 Processor (2.66 GHz, 65 Watts, 1333 FSB) (1) Dual-Core Intel Xeon 5140 Processor (2.33 GHz, 65 Watts, 1333 FSB)</p> |
| <p>Dual-Core Models DL360R05 5160 1GB 416565-xx1 DL360R05 5150 1GB</p> | <p>Cache Memory One of the following depending on Model</p> | <p>Quad-Core: 8MB (2 x 4MB) Level 2 cache; Intel Xeon Processor 5300 Sequence Dual-Core: 4MB (1 x 4MB) Level 2 cache; Intel Xeon Processor 5100 Sequence</p> |

| | | |
|--|--|---|
| 416563-xx1 DL360R05 5140 1GB 416562-xx1 | Memory One of the following depending on Model | Dual-Core: 4MB (2 x 2MB) Level 2 cache; Intel Xeon Processor 5000 Sequence 2 GB (2x1GB) Standard on E5335 Model; PC2-5300 Fully Buffered DIMMs (DDR2-667) 1 GB (2 x 512 MB) Standard on E5320, 5140-5160, 5060 Models; PC2-5300 Fully Buffered DIMMs (DDR2-667) |
| | Network Controller | Embedded NC373i Multifunction Gigabit Server Adapters |
| | Storage Controller | HP Smart Array P400i/256MB Controller (RAID 0/1/1+0/5) |
| | Hard Drive | No drives included; (4) drive bays active. (6) bays supported with optional storage cable (PN 399546-B21) |
| | Internal Storage | 876GB SAS; 720GB SATA |
| | Optical Drive | Optional DVD, DVD/CD-RW, or Floppy |
| | PCI-Express Slots | 1 full-length x8 PCI-Express slot 1 low-profile x8 PCI-Express slot |
| | Power Supply | (1) 700W power supply, redundant optional |
| | Fans | 9 total, redundancy standard |
| | Form Factor | Rack (1U), (1.75 in/4.45 cm); 27.75 inch depth (70.5cm) |

| | | |
|---|--|---|
| HP DL360 G5 Entry Models | Processor(s) One of the following depending on Model | (1) Quad-Core Intel Xeon Processor E5310 (1.60 GHz 80 Watts, 1066 FSB) (1) Dual-Core Intel Xeon 5130 Processor (2.00 GHz, 65 Watts, 1333 FSB) (1) Dual-Core Intel Xeon 5120 Processor (1.86 GHz, 65 Watts, 1066 FSB) (1) Dual-Core Intel Xeon 5110 Processor (1.6 GHz, 65 Watts, 1066 FSB) |
| Quad-Core Models DL360R05 E5310 1GB 438312-xx1 | | |
| Dual-Core Models DL360R05 5130 1GB 416561-xx1 DL360R05 5120 1GB 416560-xx1 DL360R05 5110 1GB 416559-xx1 | Cache Memory One of the following depending on Model | Quad-Core: 8MB (2x4MB) Level 2 cache- Intel Xeon Processor 5300 Sequence Dual-Core: 4MB (1 x 4MB) Level 2 cache - Intel Xeon Processor 5100 Sequence |
| | Memory | 1 GB (2 x 512 MB) Standard; PC2-5300 Fully Buffered DIMMs (DDR2-667) |
| | Network Controller | Embedded NC373i Multifunction Gigabit Server Adapters |
| | Storage Controller | HP Smart Array E200i/64MB Controller (RAID 0/1/1+0) |
| | Hard Drives | No drives included; (4) drive bays active |
| | Internal Storage | 876GB SAS; 720GB SATA |
| | Optical Drive | Optional DVD, DVD/CD-RW, or Floppy |
| | PCI-Express Slots | 1 full-length x8 PCI-Express slot 1 low-profile x8 PCI-Express slot |
| | Power Supply | (1) 700W power supply, redundant optional |
| | Fans | 9 total, N+1 redundancy standard |
| | Form Factor | Rack (1U), (1.75 in/4.45 cm); 27.75 inch depth (70.5cm) |

Country Code Key

XX=00
XX=20
XX=29
XX=37
XX=42
XX=AA

Rack Code Key

US
Brazil
Japan
APD
EURO
PRC

[Overview](#) [Standard Features](#) [Models](#) [Configuration Information - Factory Integrated Models \(North America only\)](#) [Options](#) [Memory](#) [Storage](#) [Power Specifications](#) [Technical Specifications](#)

Configuration Information - Factory Integrated Models (North America only)

NOTE: This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

NOTE: For Configure to Order requirements within EMEA region, please consult local Sales Contact.

NOTE: HP does not allow factory integration of options into standard models listed above.

Configure-to-order servers must start with a CTO Chassis.

NOTE: This product offering does not support HP Factory Express Server Configuration Level 1.

NOTE: FIO indicates that this option only available as a Factory Installable Option.

Step 1: Base Configuration (choose one of the following configurable models)

| | | |
|---------------|--|------------|
| Models | HP ProLiant DL360 G5 Rack CTO Chassis | 399524-B21 |
| | Factory Integrated Model ships with: | |
| | Embedded NC373i Multifunction Gigabit Server Adapter | |
| | Integrated Lights-Out 2 (iLO 2) embedded | |
| | 1 full-length and 1 low-profile x8 PCI-Express slots | |
| | 9 fans; N+1 fan redundancy | |
| | (1) 700W power supply, redundant optional | |
| | Rack (1U), (1.75 in/4.45 cm) | |

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

| | | |
|----------------------------|--|------------|
| Processors | Quad-Core Intel Xeon Processor X5355 – 2.66GHz, 120 Watts, 1333 FSB | 435956-L21 |
| | Quad-Core Intel Xeon Processor E5345 – 2.33GHz, 80 Watts, 1333 FSB | 435954-L21 |
| | Quad-Core Intel Xeon Processor E5335 – 2.00GHz, 80 Watts, 1333 FSB | 435952-L21 |
| | Quad-Core Intel Xeon Processor E5320 – 1.86GHz, 80 Watts, 1066 FSB | 435950-L21 |
| | Quad-Core Intel Xeon Processor L5320 – 1.86GHz, 50 Watts, 1066 FSB | 435958-L21 |
| | Quad-Core Intel Xeon Processor E5310 – 1.60GHz, 80 Watts, 1066 FSB | 438314-L21 |
| | Dual-Core Intel Xeon Processor 5160 – 3.00 GHz, 80 Watts, 1333 FSB | 416579-L21 |
| | Dual-Core Intel Xeon Processor 5150 – 2.66 GHz, 65 Watts, 1333 FSB | 416577-L21 |
| | Dual-Core Intel Xeon Processor 5148 – 2.33 GHz, 40 Watts, 1333 FSB | 416575-L21 |
| | Dual-Core Intel Xeon Processor 5140 – 2.33 GHz, 65 Watts, 1333 FSB | 416573-L21 |
| | Dual-Core Intel Xeon Processor 5130 – 2.00 GHz, 65 Watts, 1333 FSB | 416571-L21 |
| | Dual-Core Intel Xeon Processor 5120 – 1.86 GHz, 65 Watts, 1066 FSB | 416569-L21 |
| | Dual-Core Intel Xeon Processor 5110 – 1.60 GHz, 65 Watts, 1066 FSB | 416567-L21 |
| | NOTE: If High Performance Model features are desired, 2nd processor is included in the Performance Pack part numbers in Step 3 below. | |
| Base Memory | 1 GB FBD PC2-5300 2 x 512 MB Kit | 397409-B21 |
| | 2 GB FBD PC2-5300 2 x 1 GB Kit | 397411-B21 |
| | 4 GB FBD PC2-5300 2 x 2 GB Kit | 397413-B21 |
| | 8 GB FBD PC2-5300 2 x 4 GB Kit | 397415-B21 |
| Storage Controllers | HP E200i Controller FIO | 399548-B21 |
| | NOTE: If selected, must choose one of the two cache modules below. | |
| | HP Smart Array E200 64MB FIO Cache | 405102-B21 |
| | NOTE: Supports Smart Array E200 Controller only. | |
| | 128MB Battery-Backed Write Cache with Battery Housing | 346914-B21 |
| | NOTE: Supports Smart Array E200i Controller. | |
| | Smart Array P400i controller for DL360 G5 | 413741-B21 |
| | NOTE: If selected, must choose one of the two cache modules below. | |
| | HP Smart Array P400 256MB Cache FIO | 405139-B21 |
| | NOTE: Supports Smart Array P400 Controller and Smart Array P400i Controller only. | |
| | 512MB Battery-backed cache upgrade | 405148-B21 |
| | NOTE: Supports Smart Array P400 Controller and Smart Array P400i Controller only. | |
| | HP Smart Array P600/256 BBWC Controller | 337972-B21 |
| | NOTE: Requires PCI-X Riser option (PN 405154-B21). | |
| | NOTE: Requires HP SAS 4i to Mini SAS 4i 31 inch/.79 meter cable (PN 411100-B21). | |

Step 3: Choose Additional Factory Integratable Options

| | | |
|--------------------------|---|------------|
| Performance Packs | <p>The HP ProLiant DL360 G5 performance packs are necessary to configure a HP ProLiant DL360 G5 Performance Model. HP ProLiant DL360 G5 Performance model includes the latest performance technologies and enterprise class availability features pre-installed for convenience and value. The performance pack includes a 2nd processor, redundant power supplies, Smart Array P400i Controller with 256MB of BBWC, and storage cable to enable the all 6 disk drive bays.</p> <p>NOTE: 331903-B21 Slimline CD-RW/DVD-ROM Combo Drive Option Kit should also be selected along with the Performance Pack skus below to achieve parity to the HP ProLiant DL360 G5 Performance Models.</p> | |
| | HP DL360G5 X5160 HPM FIO Perf Pack | 430107-B21 |
| | HP DL360G5 X5150 HPM FIO Perf Pack | 431883-B21 |
| | HP DL360G5 E5345 HPM FIO Perf Pack | 435960-B21 |

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Options" section below.

| |
|---|
| Overview Standard Features Models Configuration Information - Factory Integrated Models (North America only) Options Memory Storage Power Specifications Technical Specifications |
|---|

Options

NOTE: Some options may not be factory integratable. Contact your local sales representative for additional information.

| | | |
|--|---|--|
| HP ProLiant DL360 G5 Unique Options | <p>Quad-Core Intel Xeon Processor X5355 (2.66 GHz, 120 Watts, 1333 FSB) 435956-B21</p> <p>Quad-Core Intel Xeon Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB) 435954-B21</p> <p>Quad-Core Intel Xeon Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB) 435952-B21</p> <p>Quad-Core Intel Xeon Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB) 435950-B21</p> <p>Quad-Core Intel Xeon Processor L5320 (1.86 GHz, 50 Watts, 1066 FSB) 435958-B21</p> <p>Quad-Core Intel Xeon Processor E5310 (1.60 GHz, 80 Watts, 1066 FSB) 438314-B21</p> <p>Dual-Core Intel Xeon Processor 5160 (3.00 GHz, 80 Watts, 1333 FSB) 416579-B21</p> <p>Dual-Core Intel Xeon Processor 5150 (2.66 GHz, 65 Watts, 1333 FSB) 416577-B21</p> <p>Dual-Core Intel Xeon Processor 5148 (2.33 GHz, 40 Watts, 1333 FSB) 416575-B21</p> <p>Dual-Core Intel Xeon Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB) 416573-B21</p> <p>Dual-Core Intel Xeon Processor 5130 (2.00 GHz, 65 Watts, 1333 FSB) 416571-B21</p> <p>Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB) 416569-B21</p> <p>Dual-Core Intel Xeon Processor 5110 (1.60 GHz, 65 Watts, 1066 FSB) 416567-B21</p> <p>PCI-X Riser option 405154-B21</p> <p>NOTE: To convert full-length PCI-Express slot to PCI-X slot.</p> | |
|--|---|--|

| | | |
|--------------------------------------|--|--|
| ProLiant Essentials Offerings | <p>ProLiant Essentials Value Pack Accelerated iSCSI Pack</p> <p>ProLiant Essentials Accelerated iSCSI Pack, No Media, Single License 452679-B21</p> <p>NOTE: For use with a single NIC port. Contains one license with a unique license activation key and documentation.</p> <p>NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12466_div/12466_div.HTML</p> <p>Insight Control Environment</p> <p>HP Insight Control Environment, No Media 1-Server License including 1 year of 24x7 Technical Support and Updates 452148-B21</p> <p>NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.HTML</p> | |
|--------------------------------------|--|--|

| | |
|---|------------|
| ProLiant Essential RDMA Pack | |
| HP ProLiant Essentials RDMA Pack for Embedded Multifunction Gigabit Server Adapters, No Media, 1-Server License | 452681-B21 |
| NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12573_div/12573_div.HTML | |
| Rapid Deployment Pack | |
| ProLiant Essentials Rapid Deployment Pack No Media 1-Server License including 1 year of 24x7 Technical Support and Updates | 452151-B21 |
| NOTE: This license allows 1 server to be deployed and managed via RDP. | |
| NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11053_div/11053_div.HTML | |
| Server Migration Pack | |
| ProLiant Essentials Server Migration Pack, No Media, 1-Migration License, including 1 year of 24x7 Technical Support and Updates | 435663-B21 |
| NOTE: This license allows 1 P2V, V2P, or V2V migration. Contains one license with a unique license activation key and documentation | |
| NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12328_div/12328_div.HTML | |
| Server Migration Pack - P2P | |
| ProLiant Essentials Server Migration Pack - P2P Edition, 1- Migration License, - License Only, No Media | 417435-B21 |
| NOTE: This license allows 1 migration. Contains one license with a unique license activation key and documentation | |
| NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12467_div/12467_div.HTML | |
| Virtual Machine Management Pack | |
| ProLiant Essentials Virtual Machine Management Pack, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates | 452153-B21 |
| NOTE: For use with a single server. Contains one license with a unique license activation key and documentation. | |
| NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12328_div/12328_div.HTML | |
| Remote Management | |
| Integrated Lights-Out Advanced Pack | |
| Integrated Lights-Out Advanced Pack, No Media ,1 Server License | 452141-B21 |
| NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/10861_div/10861_div.HTML | |
| Integrated Lights-Out Select Pack | |
| Integrated Lights-Out Select Pack, No Media, 1 Server License | 452158-B21 |
| NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/10861_div/10861_div.HTML | |
| Integrated Lights-Out Power Management Pack | |
| HP iLO Power Management Pack, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates | 452145-B21 |
| NOTE: This option kit includes 1 license for iLO Advanced and Insight Power Manager. | |
| NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12632_div/12632_div.HTML | |
| Insight Power Manager | |
| HP Insight Power Manager, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates | 452677-B21 |
| NOTE: This option kit includes 1 license for Insight Power Manager. | |
| NOTE: For additional License Kits, please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12623_div/12623_div.HTML | |
| NOTE: Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to http://www.hp.com/servers/proliantessentials or the various ProLiant Essentials Value Pack product QuickSpecs for more information. | |
| NOTE: For more information regarding ProLiant Essentials Software, please see the following URL: http://www.hp.com/servers/proliantessentials . | |

| | | | |
|--|---|-------------------------------------|--|
| Processor | Quad-Core Intel Xeon Processor X5355 (2.66 GHz, 120 Watts, 1333 FSB) | 435956-B21 | |
| | Quad-Core Intel Xeon Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB) | 435954-B21 | |
| | Quad-Core Intel Xeon Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB) | 435952-B21 | |
| | Quad-Core Intel Xeon Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB) | 435950-B21 | |
| | Quad-Core Intel Xeon Processor L5320 (1.86 GHz, 50 Watts, 1066 FSB) | 435958-B21 | |
| | Quad-Core Intel Xeon Processor E5310 (1.60 GHz, 80 Watts, 1066 FSB) | 438314-B21 | |
| | Dual-Core Intel Xeon Processor 5160 (3.00 GHz, 80 Watts, 1333 FSB) | 416579-B21 | |
| | Dual-Core Intel Xeon Processor 5150 (2.66 GHz, 65 Watts, 1333 FSB) | 416577-B21 | |
| | Dual-Core Intel Xeon Processor 5148 (2.33 GHz, 40 Watts, 1333 FSB) | 416575-B21 | |
| | Dual-Core Intel Xeon Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB) | 416573-B21 | |
| | Dual-Core Intel Xeon Processor 5130 (2.00 GHz, 65 Watts, 1333 FSB) | 416571-B21 | |
| | Dual-Core Intel Xeon Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB) | 416569-B21 | |
| | Dual-Core Intel Xeon Processor 5110 (1.60 GHz, 65 Watts, 1066 FSB) | 416567-B21 | |
| | <hr/> | | |
| Memory (DIMMs) | 1 GB FBD PC2-5300 2 x 512 MB Kit | 397409-B21 | |
| | 2 GB FBD PC2-5300 2 x 1 GB Kit | 397411-B21 | |
| | 4 GB FBD PC2-5300 2 x 2 GB Kit | 397413-B21 | |
| | 8 GB FBD PC2-5300 2 x 4 GB Kit | 397415-B21 | |
| <hr/> | | | |
| Optical Drives | Slimline CD-RW/DVD-ROM Combo Option Kit | 331903-B21 | |
| | Slimline DVD-ROM Drive (8X/24X) Option Kit | 264007-B21 | |
| | HP DVD±R/RW 8X Slim | 383975-B21 | |
| | Slimline CD-ROM Drive 24X | 356963-B21 | |
| <hr/> | | | |
| Diskette Drive | Slimline Ejectable Floppy drive | 390164-B21 | |
| <hr/> | | | |
| Hard Drives | Serial Attached SCSI (SAS) SFF Hot Plug | | |
| | HP 36GB 3G SAS 10K SFF SP HDD | 375859-B21 | |
| | HP 36GB 3G SAS 15K SFF SP HDD | 431933-B21 | |
| | HP 72GB 3G SAS 10K SFF SP HDD | 375861-B21 | |
| | HP 72GB 3G SAS 15K SFF SP HDD | 431935-B21 | |
| | HP 146GB 3G SAS 10K SFF SP HDD | 431958-B21 | |
| | NOTE: Please see the SAS Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.HTML (Worldwide) | | |
| | SFF SATA Hot Plug | | |
| | HP 60GB 1.5G SATA 5.4K SFF HDD | 379306-B21 | |
| | HP 120GB 1.5G SATA 5.4K SFF HDD | 431786-B21 | |
| | NOTE: SATA drives have a 1 year warranty. Please see the SATA Hard Drive QuickSpecs for Technical Specifications such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature: http://h18000.www1.hp.com/products/quickspecs/11940_div/11940_div.HTML (Worldwide) | | |
| | <hr/> | | |
| | Storage Controllers | SAS Controllers | |
| | | Smart Array E200i Controller | |
| 128-MB Battery-Backed Write Cache (BBWC) | | 346914-B21 | |
| NOTE: Supports Smart Array E200i Controller only. | | | |
| Smart Array E500 Controller | | | |
| Smart Array E500/256MB Controller | | 435129-B21 | |
| Smart Array P400i Controller | | | |
| HP Smart Array P400i/256MB Controller | 399550-B21 | | |
| Battery-backed write cache upgrade | 383280-B21 | | |

| | |
|--|------------|
| NOTE: For Smart Array P400 Controller and Smart Array P400i Controller only. | |
| 512MB Battery-backed cache upgrade | 405148-B21 |
| NOTE: For Smart Array P400 Controller and Smart Array P400i Controller only. | |
| Smart Array P600 Controller | |
| HP Smart Array P600/256 BBWC Controller | 337972-B21 |
| NOTE: Requires DL360 G5 PCI-X conversion kit (PN 405154-B21). | |
| 512 MB Battery-Backed Cache Upgrade | 372538-B21 |
| NOTE: This 512-MB Battery-Backed Cache Module upgrade kit supports the Smart Array P600 Controller and the Smart Array 6400 series Controller. | |
| Smart Array P800 Controller | |
| HP Smart Array P800/512 BBWC Controller | 381513-B21 |
| NOTE: Please see the following Controller QuickSpecs for additional information: | |
| http://h18000.www1.hp.com/products/quickspecs/12460_div/12460_div.HTML (Smart Array E200 Controller) | |
| http://h18000.www1.hp.com/products/quickspecs/12700_div/12700_div.HTML (Smart Array E500 Controller) | |
| http://h18000.www1.hp.com/products/quickspecs/12400_div/12400_div.HTML (Smart Array P400 Controller) | |
| http://h18000.www1.hp.com/products/quickspecs/12247_div/12247_div.HTML (Smart Array P600 Controller) | |
| http://h18000.www1.hp.com/products/quickspecs/12616_div/12616_div.HTML (Smart Array P800 Controller) | |
| SAS HBA | |
| HP SC44Ge Host Bus Adapter | 416096-B21 |
| HP 8 Internal Port SAS HBA with RAID | 347786-B21 |
| NOTE: Supports SAS and SATA disk drive. RAID 0,1 supported. | |
| NOTE: Please see the following QuickSpecs for additional information: | |
| http://h18004.www1.hp.com/products/quickspecs/12617_div/12617_div.html (SC44Ge HBA) | |
| http://h18004.www1.hp.com/products/quickspecs/12332_div/12332_div.html (SAS HBA) | |
| SAS Cables | |
| HP Mini SAS 4i 13.4 inch/0.35 m cable | 399546-B21 |
| NOTE: Used to connect Smart Array P400i Controller to DL360 G5 5th and 6th drive bays. | |
| HP SAS 4i to Mini SAS 4i 31 inch/.79 meter cable | 411100-B21 |
| NOTE: Used to connect SA-P600, SA-P400, SA-E200 Controllers to the HP ProLiant DL360 G5 drive backplane. This kit supports all six drive bays. | |
| SCSI Controllers for External Drive/Storage Support | |
| Smart Array 6402/128 Controller | 273915-B21 |
| NOTE: For support of external drives only. | |
| Smart Array 6404/256 Controller | 273914-B21 |
| NOTE: For support of external drives only. | |
| Smart Array 642 Controller | 291967-B21 |
| NOTE: For support of external drives only. | |
| 128MB Battery-Backed Cache Enabler | 351580-B21 |
| NOTE: This 128-MB Battery-Backed Cache Module upgrade kit supports the Smart Array 642 Controller. | |
| 512 MB Battery-Backed Cache Upgrade | 372538-B21 |
| NOTE: This 512-MB Battery-Backed Cache Module upgrade kit supports the Smart Array P600 Controller and the Smart Array 6400 series Controller. | |
| 64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 | 374654-B21 |
| SCSI HBA | |
| HP SC11Xe Host Bus Adapter | 412911-B21 |
| NOTE: Please see the QuickSpecs for additional information: | |
| http://h18000.www1.hp.com/products/quickspecs/10429_div/10429_div.HTML (SCSI Adapter) | |

http://h18000.www1.hp.com/products/quickspecs/11555_div/11555_div.HTML
(U320 Adapter)
http://h18000.www.1.hp.com/products/quickspecs/11943_div/11943_div.HTML
(U320 SCSI HBA)
http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.HTML
(SC11Xe HBA)

| | | |
|---|---|------------|
| Communications | HP NC110T PCI Express Gigabit Server Adapter | 434905-B21 |
| | NOTE: Does not support Windows 2000. | |
| | HP NC150T PCI 4-port Gigabit 1000T Combo Switch Adapter | 367132-B21 |
| | HP NC310F PCI-X 1000SX Gigabit Server Adapter | 368169-B21 |
| | HP NC360T PCI Express Dual Port Gigabit Server Adapter | 412648-B21 |
| | HP NC364T PCI Express Quad Port Gigabit Server Adapter | 435508-B21 |
| | NOTE: Does not support Windows 2000. | |
| | HP NC373F PCI Express Multifunction Gigabit Server Adapter | 394793-B21 |
| | HP NC373T PCI Express Multifunction Gigabit Server Adapter | 394791-B21 |
| | HP NC380T PCI Express Dual Port Multifunction Gigabit Server Adapter | 394795-B21 |
| | HP NC510F PCIe 10 Gigabit Server Adapter | 414126-B21 |
| | NOTE: A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510F adapter. | |
| | HP NC510C PCIe 10 Gigabit Server Adapter | 414129-B21 |
| NOTE: A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510C adapter. | | |
| HP NC7771 PCI-X 1000T Gigabit Server Adapter | 290563-B21 | |
| HP IB 4X SDR PCI-e single PORT HCA | 431038-B21 | |
| HP IB 4X DDR PCI-e Single PORT HCA | 431039-B21 | |

| | | |
|--------------------------|---|------------|
| Redundant Options | 700W HP redundant power supply with IEC cord only | 399542-B21 |
| | 700W HP redundant power supply with IEC cord and Japan cord (Japan) | 399542-291 |

Tape Drives

NOTE: For the complete listing of Tape Drive offerings, please see:
<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

For recommended tape drive offerings for this ProLiant server see the following:

USB Tape Drives

| | |
|--|--------|
| HP StorageWorks DAT 40 USB Internal Tape Drive (Carbonite) | DW022A |
|--|--------|

NOTE: HP recommends combining this tape drive with the 1U USB Rack-Mount kit (A8007A) for a complete rack-mount solution.

| | |
|--|--------|
| HP StorageWorks 1U USB Rack-Mount Kit with one DAT 72 USB Tape Drive | AG594A |
|--|--------|

SAS Tape Drives

NOTE: Connecting hard drive cage and SAS tape to the same SAS Controller using split cable (supplied with tape drive) deactivates 1 of the hard drive bays. Actual hard drive bay deactivated depends on where split cable plugs into SAS drive connector. Example: 3x SAS cable connector plugged into SAS drive connector (5-8) on the back of the hard drive cage would mean drive bay 8 is deactivated.

| | |
|---|--------|
| HP StorageWorks Ultrium 448 SAS Internal Tape Drive | DW085A |
|---|--------|

NOTE: HP recommends combining this tape drive with the 1U SAS Rack-Mount kit (AE459A) for a complete rack-mount solution.

| | |
|---|--------|
| HP StorageWorks Ultrium 920 SAS Internal Tape Drive | EH847A |
|---|--------|

NOTE: HP recommends combining this tape drive with the 1U SAS Rack-Mount kit (AE459A) for a complete rack-mount solution.

NOTE: Please refer to the "Tape Drives, Tape Autoloaders & Tape Libraries" table in the Storage section of this document for a list of SAS controllers with tape support.

Ultrium Tape Drives

| | |
|---|--------|
| HP StorageWorks Ultrium 232 Internal Tape Drive (Carbonite) | DW064A |
|---|--------|

NOTE: HP recommends combining this tape drive with the 1U SCSI Rack-

Mount kit (A7445B) for a complete rack-mount solution.

HP StorageWorks 1U Rack-mount kit with one Ultrium 448 (Carbonite)

DW028B

HP StorageWorks 1U SCSI Rack-mount kit with one Ultrium 920

EH903A

NOTE: Please see the HP StorageWorks Ultrium Tape Drive QuickSpecs for additional options such as controllers, media, and other related items:

http://h18006.www1.hp.com/products/quickspecs/11739_div/11739_div.html
(Worldwide)

http://h18006.www1.hp.com/products/quickspecs/12128_div/12128_div.html
(Worldwide)

For an up-to-date listing of the latest O/S and software support details for HP Ultrium tape drives, please visit: <http://www.hp.com/go/connect>

DAT Drives

HP StorageWorks DAT 72 SCSI Internal Tape Drive (Carbon)

Q1522B

NOTE: HP recommends combining this tape drive with the 1U SCSI Rack-Mount kit (A7445B) for a complete rack-mount solution.

NOTE: Please see the DAT Tape Drive QuickSpecs for controllers, media, and other options:

http://h18000.www1.hp.com/products/quickspecs/11883_div/11883_div.HTML
(Worldwide)

For an up-to-date listing of the latest O/S and software support details for HP DAT drives, please visit: <http://www.hp.com/go/connect>

Rack-Mount Tape Drive Enclosures

HP StorageWorks 1U SCSI Rack-Mount kit

A7445B

NOTE: The 1U Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with multiple Single-Ended and LVD SCSI tape drives including the DAT 24, DAT 40, DAT 72, DLT VS80, DLT VS160, Ultrium 215, Ultrium 232, Ultrium 448 and Ultrium 920 tape drives.

HP StorageWorks 1U USB Rack-Mount Kit

A8007A

NOTE: The 1U USB Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with the DAT 24 USB, DAT 40 USB and DAT 72 USB tape drives.

HP StorageWorks 1U SAS Rack-Mount Kit

AE459A

NOTE: The 1U SAS Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with the Ultrium 448 SAS tape drive.

NOTE: Connecting hard drive cage and SAS tape to the same SAS Controller using split cable (supplied with tape drive) deactivates 1 of the hard drive bays. Actual hard drive bay deactivated depends on where split cable plugs into SAS drive connector. Example: 3x SAS cable connector plugged into SAS drive connector (5-8) on the back of the hard drive cage would mean drive bay 8 is deactivated.

NOTE: Please see the Rack-Mount Tape Drive Kits QuickSpecs for additional information regarding these kits:

http://h18000.www1.hp.com/products/quickspecs/10854_div/10854_div.HTML
(Worldwide)

HP D2D Backup System

HP StorageWorks D2D110 Backup System

EH880A

NOTE: 1TB of Disk Storage.

HP StorageWorks D2D110 Backup System with Data Protector Express Software Kit

EH923A

NOTE: 1TB of Disk Storage.

HP StorageWorks D2D120 Backup System

EH884A

NOTE: 2TB of Disk Storage.

HP StorageWorks D2D120 Backup System with Data Protector Express Software Kit

EH924A

NOTE: 2TB of Disk Storage.

NOTE: Please see the HP D2D Backup Systems QuickSpecs for additional information:

http://h18000.www1.hp.com/products/quickspecs/12651_div/12651_div.HTML
(Worldwide)

Tape Autoloaders

HP StorageWorks DAT Autoloader

| | |
|--|--------|
| HP StorageWorks DAT 72x10 tape autoloader | AE313B |
| HP StorageWorks 1/8 Tape Autoloader | |
| HP StorageWorks 1/8 Ultrium 960 Tape Autoloader | AF204A |
| HP StorageWorks 1/8 G2 Ultrium 920 SAS Autoloader | AH558A |
| HP StorageWorks 1/8 Ultrium 920 G2 Tape Autoloader | AH165A |
| HP StorageWorks 1/8 Ultrium 448 G2 Tape Autoloader | AH164A |
| HP StorageWorks 1/8 Ultrium 232 G2 Tape Autoloader | AH163A |
| HP StorageWorks 1/8 G2 Tape Autoloader Rack Kit | AH166A |
| NOTE: Required to install the 1/8 G2 Autoloaders in a standard 19-inch rack; includes rails and rackmount instructions | |
| 1/8 Tape Autoloader Rackmount Kit | C9268R |
| NOTE: Required to install the 1/8 tape autoloader in a standard 19-inch rack. | |
| NOTE: Please reference the Autoloader QuickSpecs at http://www.hp.com/go/automation for additional information needed to create a complete solution; reference current compatibility information at http://www.hp.com/go/ebs . | |

Tape Libraries

| | |
|---|--------|
| HP StorageWorks MSL2024 Tape Library | |
| HP StorageWorks MSL2024 1 Ultrium 960 Drive Library | AG115A |
| HP StorageWorks MSL2024 1 Ultrium 960 4GB FC Library | AG326B |
| HP StorageWorks MSL2024 1 Ultrium 920 SAS Drive Library | AH559A |
| HP StorageWorks MSL2024 1 Ultrium 920 Drive Library | AH169A |
| HP StorageWorks MSL2024 2 Ultrium 920 Drive Library | AH170A |
| HP StorageWorks MSL2024 1 Ultrium 448 Drive Library | AG116A |
| HP StorageWorks MSL2024 2 Ultrium 448 Drive Library | AG117A |
| HP StorageWorks MSL4048 Tape Library | |
| HP StorageWorks MSL4048 1 Ultrium 448 Drive Library | AG320A |
| HP StorageWorks MSL4048 2 Ultrium 448 Drive Library | AG321A |
| HP StorageWorks MSL4048 1 Ultrium 920 SAS Drive Library | AH560A |
| HP StorageWorks MSL4048 1 Ultrium 920 Drive Library | AH171A |
| HP StorageWorks MSL4048 2 Ultrium 920 Drive Library | AH172A |
| HP StorageWorks MSL4048 1 Ultrium 960 Drive Library | AG322A |
| HP StorageWorks MSL4048 1 Ultrium 960 4GB FC Library | AG324B |
| HP StorageWorks MSL4048 2 Ultrium 960 Drive Library | AG323A |
| HP StorageWorks MSL4048 2 Ultrium 960 4GB FC Library | AG325B |
| HP StorageWorks MSL8096 Tape Library | |
| HP StorageWorks MSL8096 2 Ultrium 920 SAS Drive Library | AH561A |
| HP StorageWorks MSL8096 2 Ultrium 960 4GB FC Library | AH218A |
| HP StorageWorks MSL8096 2 Ultrium 960 Drive Library | AH219A |
| HP StorageWorks MSL6000 Tape Library | |
| Ultrium 960 technology | |
| HP StorageWorks MSL6030 1 Ultrium 960 Dr LVDS Library | AD606B |
| HP StorageWorks MSL6030 1 Ultrium 960 Dr FC Library | AD608B |
| HP StorageWorks MSL6030 2 Ultrium 960 Dr LVDS Library | AD607B |
| HP StorageWorks MSL6030 2 Ultrium 960 Dr FC Library | AD609B |
| Ultrium 460 technology | |
| HP StorageWorks MSL6030 1 Ultrium 460 Dr LVDS Library | AD598B |
| HP StorageWorks MSL6030 1 Ultrium 460 Dr FC Library | AD600B |
| HP StorageWorks MSL6030 2 Ultrium 460 Dr LVDS Library | AD599B |
| HP StorageWorks MSL6030 2 Ultrium 460 Dr FC Library | AD601B |
| NOTE: Please reference the MSL2024, MSL4048 and MSL6000 Tape Library QuickSpecs at http://www.hp.com/go/automation for additional information needed to create a complete solution; reference current compatibility information at http://www.hp.com/go/ebs . | |

HP StorageWorks Modular Smart Array 20

| | |
|--|------------|
| HP StorageWorks Modular Smart Array 20 | 335921-B21 |
| NOTE: Rack-mountable 12 (SATA) drive enclosure with U320 Host connectivity, redundant power supplies. | |
| HP StorageWorks Modular Smart Array 20 Starter Kit | 366172-B21 |

NOTE: Rack-mountable 12 (SATA) drive enclosure with U320 Host connectivity, redundant power supplies. Includes Smart Array 6402/128 Controller.

NOTE: The Modular Smart Array Enclosure 20 Family supports the SATA 1.5Gb/s 3.5" Hot Plug Hard Drives.

| | | |
|---|--|------------|
| HP StorageWorks Modular Smart Array 30 | HP StorageWorks Modular Smart Array 30 SB NOTE: Rack-mountable 14 drive enclosure with single bus, redundant power supplies | 302969-B21 |
| | HP StorageWorks Modular Smart Array 30 DB NOTE: Rack-mountable 14 drive enclosure with dual bus, redundant power supplies NOTE: The Modular Smart Array Enclosure 30 Family supports the Wide Ultra3, Ultra320 Hot Plug Hard Drives. | 302970-B21 |

| | | |
|---|--|------------|
| HP StorageWorks Modular Smart Array 50 | HP StorageWorks Modular Smart Array 50 Enclosure NOTE: Please see the Modular Smart Array 50 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/12245_div/12245_div.HTML (Worldwide) | 364430-B21 |
|---|--|------------|

| | | |
|--|--|------------|
| HP StorageWorks Modular Smart Array 500 | HP StorageWorks Modular Smart Array 500 Generation 2 NOTE: Please see the Modular Smart Array 500 Generation 2 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: http://h18000.www1.hp.com/products/quickspecs/11956_div/11956_div.HTML (Worldwide) | 335880-B21 |
|--|--|------------|

| | | |
|---|--|------------|
| HP StorageWorks Modular Smart Array 1000 | HP StorageWorks Modular Smart Array 1000 NOTE: Please see the Modular Smart Array 1000 QuickSpecs for additional options and configuration information at: http://h18000.www1.hp.com/products/quickspecs/11033_div/11033_div.HTML (Worldwide) | 201723-B22 |
|---|--|------------|

| | | |
|--|--|--------|
| HP StorageWorks Modular Smart Array 1500 cs | Modular Smart Array 1500 Controller Shelf NOTE: Please see the StorageWorks Modular SAN Array 1500 cs QuickSpecs for additional options and configuration information at: http://www.hp.com/go/MSA1500cs | AA986A |
|--|--|--------|

| | | |
|------------------------|---|------------|
| Cluster Options | ProLiant Cluster Starter Kit NOTE: For additional information regarding the ProLiant Cluster Starter Kit please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11935_div/11935_div.html (Worldwide) | 364023-B22 |
| | HP HA/F200 for Entry SAN Cluster NOTE: For additional information regarding the ProLiant Cluster for Entry Level SAN please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11932_div/11932_div.html (Worldwide) NOTE: For configuration/certification options for the HP Parallel Database Cluster for Oracle RAC please go to: http://www.hp.com/solutions/highavailability/oracle | 364026-B22 |
| | HP Serviceguard for Linux ProLiant Cluster A.11.16 for SUSE SLES 9 & 10 and Red Hat EL 3 & 4 (2 node license cluster kit) | 305199-B26 |
| | HP Serviceguard for Linux, A.11.18 (single license version - Red Hat EL 4&5, SUSE SLES9&10) | 305199-B27 |
| | HP Serviceguard for Linux A.11.16 for SUSE SLES 9 & 10 and Red Hat EL 3 & 4 (single license version) | 307754-B26 |
| | HP Serviceguard for Linux ProLiant Cluster, A.11.18 (2 license version - Red Hat EL 4&5, SUSE SLES9&10) | 307754-B27 |
| | | |

| | |
|---|-------------|
| HP Serviceguard for Linux and Red Hat Global File System - 1 year subscription | T2798AA#001 |
| HP Serviceguard for Linux and Red Hat Global File System - 3 years subscription | T2798AA#003 |
| NOTE: For additional information regarding HP Serviceguard for Linux, please see the following QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/11518_div/11518_div.html (Worldwide) | |
| NOTE: For configuration/certification options for HP Serviceguard for Linux please go to: http://www.hp.com/info/sglx | |

StorageWorks Options StorageWorks Fibre Channel HBA

NOTE: The following is a list of all Fibre Channel Host Bus Adapters for Windows and Linux. For detailed compatibility information please see: <http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

| | |
|--|--------|
| HP StorageWorks FC2142SR 4Gb PCI-e HBA | A8002A |
| HP StorageWorks FC2242SR Dual Channel 4 Gb PCI-e HBA | A8003A |
| HP StorageWorks FC1142SR 4Gb PCI-e HBA | AE311A |
| HP StorageWorks FC1242SR Dual Channel 4 Gb PCI-e HBA | AE312A |
| HP StorageWorks FC2143 4Gb PCI-X 2.0 -to-Fibre Channel HBA | AD167A |
| HP StorageWorks FC2243 Dual Channel 4Gb PCI-X 2.0 HBA | AD168A |
| HP StorageWorks FC1143 4Gb PCI-X 2.0 HBA | AB429A |
| HP StorageWorks FC1243 Dual Channel 4Gb PCI-X 2.0 HBA | AE369A |

StorageWorks SCSI HBA

| | |
|--------------------------------|--------|
| HP U320e SCSI Host Bus Adapter | AH627A |
|--------------------------------|--------|

NOTE: Recommended Dual Channel Ultra320 SCSI Controller for connecting multi-drive MSL tape libraries to ProLiant servers.

Uninterruptible Power Systems – Rack Mountable

| | |
|---------------------------------|--------|
| HP, R1.5kVA UPS, 1U, NA | AF419A |
| HP, R1.5kVA UPS, 1U, INTL | AF418A |
| HP, R1.5kVA UPS, 1U, JPN/TW | AF421A |
| HP R3000 VA UPS, 2U, DTC, INTL | AF414A |
| HP R3000 VA UPS, 2U, L5-30, NA | AF422A |
| HP R3000 VA UPS, 2U, L6-20, NA | AF423A |
| HP R3000 VA UPS, 2U, L6-20, JPN | AF424A |
| HP R3000 VA UPS, 2U, L5-30, JPN | AF425A |
| HP R5500 VA UPS, INTL | AF416A |
| HP R5500 VA UPS, NA/JPN | AF426A |

Power Cords

NOTE: The HP ProLiant DL360 G5 ships with an IEC-IEC power cord used for rack mounting with Power Distribution Units (PDUs).

| | |
|--|------------|
| Nema 5-15P to IEC320-C13 | AF556A |
| Power Cord, Euro, 10A 250 V Straight (12 ft/3.7 m) | 157215-021 |
| Power Cord, UK, 10A 250 V Straight (12 ft/3.7 m) | 157216-031 |
| Power Cord, Danish, 10A 250 V Straight (12 ft/3.7 m) | 157218-081 |
| Power Cord, Swiss, 10A 250 V Straight (12 ft/3.7 m) | 157219-111 |
| Power Cord, Italian, 10A 250 V Straight (12 ft/3.7 m) | 157217-061 |
| Power Cord, South Africa, 10A 250 V Straight (12 ft/3.7 m) | 157220-AR1 |

HP Monitored Power Distribution Unit (PDU) HP Monitored Power Distribution Unit: Full Rack Version

| | |
|------------------------------------|--------|
| 17.3 kVA Monitored PDU Model S2324 | AF503A |
| 8.6 kVA Monitored PDU Model S1324 | AF504A |
| 16.6 kVA Monitored PDU Model S2140 | AF505A |
| 8.3 kVA Monitored PDU Model S1140 | AF506A |
| 22 kVA Monitored PDU Model S2316 | AF507A |
| 11 kVA Monitored PDU Model S1316 | AF508A |

| | |
|------------------------------------|--------|
| 14.7 kVA Monitored PDU Model S2132 | AF509A |
| 7.3 kVA Monitored PDU Model S1132 | AF510A |
| 4.9kVA Monitored PDU model S124 | AF914A |
| 7.3kVA Monitored PDU model S132 | AF915A |

| | | |
|--|--|------------|
| Modular PDUs 1U/0U (Up to 32 outlets) NOTE: 1U/0U mounting brackets shipped with the unit (optimized for 10000 and 9000 series racks). | Fixed Cord Extension Bars | 351655-B21 |
| | NOTE: Two extension bar sticks; each with (7) C13 plugs. | |
| | 3.6kVA Model - mPDU, 16A, High (WW) | 252663-B24 |
| | 2.8 kVA Model - mPDU, 24A, Low (NA/JPN) | 252663-D71 |
| | 4.9kVA Model - mPDU, 24A, High (NA/JPN) | 252663-D72 |
| | 7.3kVA Model - mPDU, 32A, High (INT'L) | 252663-D71 |
| | 8.3kVA Model - mPDU, 40A, High (WW) | 252663-B21 |
| | 8.3kVA Model - mPDU, 40A, High (power cord attached) (NA/JPN) | 252663-D73 |
| | 9.2kVA Model - mPDU, 40A, High (power cord attached) (INTL) | 252663-B32 |
| | 8.3kVA Model - mPDU 40A, High (core only) (NA/JPN) | 252663-D75 |
| | 9.2kVA Model - mPDU 40 A, High (core only) (Int'l) | 252663-B34 |
| | 8.3kVA Model - mPDU 32A, High (core only) (Int'l) | 252663-B33 |
| | 4.9kVA Model - mPDU 24A, High (core only) (NA/JPN) | 252663-D74 |
| | NOTE: Please see the following Modular Power Distribution Unit (Zero-U/1U Modular PDUs) QuickSpecs for additional options including shorter jumper cables and country specific power cords: http://h18000.www1.hp.com/products/quickspecs/11041_div/11041_div.HTML (Worldwide) | |

| | | |
|--------------------|---|------------|
| USB Options | HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver) | DC172B |
| | USB 1.44-MB External Diskette Drive (Carbonite) | DC141B |
| | HP USB 04 Standard Keyboard | DT528A#ABA |
| | HP 1GB USB 2.0 Floppy Drive Key | 442085-B21 |
| | HP 256MB USB 2.0 Floppy Drive Key | 442084-B21 |

| | | |
|--|---|------------|
| HP ProLiant DL360 G5 Deployment Options | 700W HP redundant power supply with IEC cord only | 399542-B21 |
| | 700W HP redundant power supply with IEC cord and Japan cord (Japan) | 399542-291 |

| | | |
|------------------|---|------------|
| Rack Kits | 1U Cable Management Arm NOTE: Package contains two cable management arms. | 365403-B21 |
|------------------|---|------------|

| | | |
|---|---|------------|
| HP Rack 5000 Series (Graphite Metallic) | HP 5642 Rack Unassembled | 358254-B21 |
| | NOTE: Please see the HP Rack 5642 QuickSpecs for additional part numbers and Technical Specifications such as height, width, depth, weight, and color: http://h18000.www1.hp.com/products/quickspecs/12074_div/12074_div.HTML (Worldwide) | |
| | NOTE: For additional information regarding Rack Cabinets, please see the following URL: http://www.hp.com/go/rackandpower . | |

| | | |
|--|--|--------|
| HP Rack 10000 G2 Series (Carbon/Graphite Metallic) | 10642 G2 (42U) Rack Cabinet – Pallet | AF001A |
| | 10642 G2 (42U) Rack Cabinet – Shock Pallet | AF002A |
| | 10642 G2 (42U) Rack Cabinet – Crated | AF003A |
| | 10642 G2 (42U) Rack Cabinet, with Extension – Shock Pallet | AF004A |
| | 10636 G2 (36U) Rack Cabinet – Pallet | AF011A |
| | 10636 G2 (36U) Rack Cabinet – Shock Pallet | AF012A |
| | 10636 G2 (36U) Rack Cabinet – Crated | AF013A |
| | 10636 G2 (36U) Rack Cabinet, with Extension – Shock Pallet | AF014A |
| | 10622 G2 (22U) Rack Cabinet - Pallet | AF021A |
| | 10622 G2 (22U) Rack Cabinet - Shock Pallet | AF022A |
| | 10842 G2 (42U) 800mm Wide Rack Cabinet - Pallet | AF041A |
| | 10842 G2 (42U) 800mm Wide Rack Cabinet - Shock Pallet | AF042A |

10647 G2 (47U) Rack Cabinet - Pallet

AF031A

NOTE: It is mandatory to use a shock pallet when shipping racks with equipment installed.

NOTE: Please see the Rack 10000 G2 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:
http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.HTML
(Worldwide)

NOTE: For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower>.

HP Rack 10000 Series HP Rack S10614 (14U) Rack Cabinet – Shock Pallet 292302-B22
(Graphite Metallic)

NOTE: xxxxxx-B22 (shock pallet) used to ship racks with equipment installed (by custom systems, VARs and Channels).

NOTE: It is mandatory to use a shock pallet in order to ship racks with equipment installed. Not all HP equipment is qualified to be shipped in the Rack 10000 series

NOTE: Please see the Rack 10000 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:
http://h18000.www1.hp.com/products/quickspecs/10995_div/10995_div.HTML
(Worldwide)

NOTE: For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower>

Keyboards and Monitors

| | |
|--|------------|
| TFT7210R Rack Mounted 17" Monitor | 348373-B21 |
| TFT7600 Rackmount Keyboard Monitor US | AG052A |
| TFT7600 Rackmount Keyboard Monitor UK | AG053A |
| TFT7600 Rackmount Keyboard Monitor GR | AG054A |
| TFT7600 Rackmount Keyboard Monitor FR | AG055A |
| TFT7600 Rackmount Keyboard Monitor IT | AG056A |
| TFT7600 Rackmount Keyboard Monitor SP | AG057A |
| TFT7600 Rackmount Keyboard Monitor DEN | AG058A |
| TFT7600 Rackmount Keyboard Monitor NOR | AG059A |
| TFT7600 Rackmount Keyboard Monitor SE/FI | AG060A |
| TFT7600 Rackmount Keyboard Monitor SWI | AG061A |
| TFT7600 Rackmount Keyboard Monitor PORT | AG062A |
| TFT7600 Rackmount Keyboard Monitor BEL | AG063A |
| TFT7600 Rackmount Keyboard Monitor JPN2 | AG064A |
| TFT7600 Rackmount Keyboard Monitor RUS | AG065A |
| TFT7600 Rackmount Keyboard Monitor INTL | AG066A |
| 1U Rackmount Keyboard with USB, US | AG072A |
| 1U Rackmount Keyboard with USB, UK | AG073A |
| 1U Rackmount Keyboard with USB, GR | AG074A |
| 1U Rackmount Keyboard with USB, FR | AG075A |
| 1U Rackmount Keyboard with USB, ITL | AG076A |
| 1U Rackmount Keyboard with USB, SP | AG077A |
| 1U Rackmount Keyboard with USB, DEN | AG078A |
| 1U Rackmount Keyboard with USB, NOR | AG079A |
| 1U Rackmount Keyboard with USB, SE/FI | AG080A |
| 1U Rackmount Keyboard with USB, SWI | AG081A |
| 1U Rackmount Keyboard with USB, PORT | AG082A |
| 1U Rackmount Keyboard with USB, BEL | AG083A |
| 1U Rackmount Keyboard with USB, JPN2 | AG084A |
| 1U Rackmount Keyboard with USB, RUS | AG085A |
| 1U Rackmount Keyboard with USB, INTL | AG086A |

NOTE: For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower>.

| | | |
|---|--|------------|
| HP KVM Switch Options | 2x1x16 IP Console Switch with Virtual Media | AF601A |
| | 4x1x16 IP Console Switch with Virtual Media | AF602A |
| | 2x16 Server Console Switch with Virtual Media | AF600A |
| | PS/2 Virtual Media Interface Adapter, 1 pack | AF604A |
| | NOTE: Requires PS/2 and one USB port on server. | |
| | Server Console Switch (KVM), 0 x 1 x 8 port | 336044-B21 |
| | Server Console Switch (KVM), 0 x 2 x 16 port | 336045-B21 |
| | PS/2 Interface Adapter, 1 pack | 262588-B21 |
| | PS/2 Interface Adapter, 8 pack | 262587-B21 |
| | USB Interface Adapter, 1 pack | 336047-B21 |
| | Serial Interface adapter - 1 Pack with power supply | 373035-B21 |
| | NOTE: Cat5e cables are required to connect Interface Adapters to Console Switches. Cat5e cables can be found at the following URL: http://www.hp.com/go/kvm . | |
| | HP 1x4 Console Switch (ALL) | AF611A |
| | PS2 Server Console Cable, 6 ft, 2 pack | AF612A |
| | USB Server Console Cable, 6 ft, 2 pack | AF613A |
| | NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: http://www.hp.com/go/kvm . | |
| HP Serial Console Server Options | HP 16 Port Serial Console Server (worldwide) | AF101A |
| | HP 48 Port Serial Console Server (worldwide) | AF102A |
| | Serial Adapter, RJ45-DB9 DCE Female, 1 Pack | AF103A |
| | Serial Adapter, RJ45-DB9 DCE Female, 8 Pack | AF110A |
| | NOTE: Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: http://www.hp.com/go/kvm . | |
| Service and Support Offerings (HP Care Pack Services) | Hardware Services 4-Hour On-site Service | |
| | 4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic | U4496E |
| | 4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic | U4497E |
| | Hardware Services 6-Hour Call to Repair On-site Service | |
| | 6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic | U4498E |
| | Hardware Services Next Business Day On-Site Service | |
| | Hardware Installation, Electronic | U4506E |
| | Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays, Electronic | U4507E |
| | Support Plus | |
| | Onsite HW support, 8am-9pm, M-F, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays, Electronic | U4508E |
| | Support Plus 24 | |
| Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic | U4509E | |
| Onsite HW support 24x7, 4hr response and SuSE Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic | U6310E | |
| Onsite HW support 24x7, 4hr response and Red Hat ES Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP | U8332E | |

holidays, Electronic

NOTE: For more information, customer/resellers can contact <http://www.hp.com/services/carepack>.

[Overview](#) [Standard Features](#) [Models](#) [Configuration Information - Factory Integrated Models \(North America only\)](#) [Options](#) [Memory](#) [Storage](#) [Power Specifications](#) [Technical Specifications](#)

Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

NOTE: Memory DIMMs in systems with the Front Side Bus (FSB) running at 1333 MHz will run at 667 MHz and in systems with a FSB running at 1066 MHz or 667 MHz the memory DIMMs will run at 533 MHz.

HP ProLiant DL360 G5 Entry and Base Models

Standard Memory

1 GB PC2-5300 Fully Buffered DIMMs (DDR2-667) installed (2 x 512 MB)

Upgrading Memory and Memory Interleaving

When upgrading memory, DIMMs 1A and 3A must match. DIMMs 5B and 7B, DIMMs 2C and 4C, and DIMMs 6D and 8D must match and must be installed as a pair. When DIMMs 1A and 2A are populated the system is automatically configured for 2:1 interleaving. When all 4 banks are populated the system is automatically configured for 4:1 interleaving. When four, six, or eight DIMMs are populated with identical DIMMs the system is automatically configured for bank interleaving.

Standard Memory Plus Optional Memory

Up to 25 GB memory is available with the standard memory of 1 GB and the optional installation of PC2-5300 Fully Buffered DIMMs (DDR2-667) memory kits.

Standard Memory Replaced with Optional Memory

Up to 32 GB of memory is available with the removal of the standard 512 MB of memory and the optional installation of PC2-5300 Fully Buffered DIMMs (DDR2-667) memory kits.

NOTE: 4 GB Fully Buffered DIMMs kits will be available shortly following server availability to allow a maximum of 32 GB. Today's maximum is 16 GB utilizing 2 GB DIMMs.

NOTE: Chart does not represent all possible configurations.

| Memory | | Slot | | | | | | | |
|----------|-------|--------|--------|-------|-------|-------|-------|-------|-------|
| | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| Standard | 1 GB | 512 MB | 512 MB | Empty | Empty | Empty | Empty | Empty | Empty |
| Optional | 25 GB | 512 MB | 512 MB | 4 GB | 4 GB | 4 GB | 4 GB | 4 GB | 4 GB |
| Maximum | 32 GB | 4 GB | 4 GB | 4 GB | 4 GB | 4 GB | 4 GB | 4 GB | 4 GB |

NOTE: In the online spare configuration, the ROM automatically configures the last populated bank as the spare memory. If only banks A and B are populated, bank B is the spare bank. If banks A, B, and C are populated, bank C is the spare bank, If banks A, B, C and D are populated, bank D is the spare bank, Online spare memory is configured through RBSU.

NOTE: Mirrored Memory uses mirrored banks to provide a high level of memory redundancy. Customer chooses to implement or not: User selectable via BIOS and default is off.

Following are memory options available from HP:

| | |
|----------------------------------|------------|
| 1 GB FBD PC2-5300 2 x 512 MB Kit | 397409-B21 |
| 2 GB FBD PC2-5300 2 x 1 GB Kit | 397411-B21 |
| 4 GB FBD PC2-5300 2 x 2 GB Kit | 397413-B21 |
| 8 GB FBD PC2-5300 2 x 4 GB Kit | 397415-B21 |

HP ProLiant DL360 G5 Performance Models

Standard Memory

2 GB PC2-5300 Fully Buffered DIMMs (DDR2-667) (2 x 1 GB)

Upgrading Memory and Memory Interleaving

When upgrading memory, DIMMs 1A and 2A must match. DIMMs 3B and 4B, DIMMs 5C and 6C, and DIMMs 7D and 8D must match and must be installed as a pair. When DIMMs 1A and 2A are populated the system is automatically

configured for 2:1 interleaving. When all 4 banks are populated the system is automatically configured for 4:1 interleaving. When four, six, or eight DIMMs are populated with identical DIMMs the system is automatically configured for bank interleaving.

Standard Memory Plus Optional Memory

Up to 14 GB memory is available with the standard memory of 2 GB and the optional installation PC2-5300 Fully Buffered DIMMs (DDR2-667) memory kits.

Standard Memory Replaced with Optional Memory

Up to 32 GB of memory is available with the removal of the standard 1 GB of memory and the optional installation of PC2-5300 Fully Buffered DIMMs (DDR2-667) memory kits.

NOTE: Chart does not represent all possible configurations.

| Memory | | Slot | | | | | | | |
|----------|-------|------|------|-------|-------|-------|-------|-------|-------|
| | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
| Standard | 2 GB | 1 GB | 1 GB | Empty | Empty | Empty | Empty | Empty | Empty |
| Optional | 14 GB | 1 GB | 1 GB | 2 GB | 2 GB | 2 GB | 2 GB | 2 GB | 2 GB |
| Maximum | 32 GB | 4 GB | 4 GB | 4 GB | 4 GB | 4 GB | 4 GB | 4 GB | 4 GB |

NOTE: In the online spare configuration, the ROM automatically configures the last populated bank as the spare memory. If only banks A and B are populated, bank B is the spare bank. If banks A, B, and C are populated, bank C is the spare bank, Online spare memory is configured through RBSU.

NOTE: Mirrored Memory uses mirrored banks to provide a high level of memory redundancy. Customer chooses to implement or not. User selectable via BIOS and default is off.

Following are memory options available from HP:

| | |
|----------------------------------|------------|
| 1 GB FBD PC2-5300 2 x 512 MB Kit | 397409-B21 |
| 2 GB FBD PC2-5300 2 x 1 GB Kit | 397411-B21 |
| 4 GB FBD PC2-5300 2 x 2 GB Kit | 397413-B21 |
| 8 GB FBD PC2-5300 2 x 4 GB Kit | 397415-B21 |

Online spare FBDIMM configuration requirements (in addition to general configuration requirements):

- When only bank A is being used, it must be fully populated with dual-rank FBDIMMs.
- If banks A and C are being used, they must be fully populated.
- If installed, bank A and bank C must contain FBDIMMs with identical part numbers.
- If installed, bank B and bank D must also contain FBDIMMs with identical part numbers.

In online spare mode, FBDIMMs must be populated as specified in the following table:

| Configuration | Branch 0 Bank A 1A and 3A | Branch 0 Bank C 2C and 4C | Branch 1 Bank B 5B and 7B | Branch 1 Bank D 6D and 8D |
|---------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| 1* | X | - | - | - |
| 2 | X | X | - | - |
| 3 | X | X | X | X |

***NOTE:** Configuration 1 is only supported if using bank A, populated with dual-rank FBDIMMs.


Mirrored memory FBDIMMs configuration requirements (in addition to general configuration requirements):

- Banks A and B must be fully populated.
- Bank A and bank B must contain FBDIMMs with identical part numbers. If installed, bank C and bank D must also contain FBDIMMs with identical part numbers.

When using mirrored memory mode, FBDIMMs must be populated as specified in the following table:

| Configuration | Bank A 1A and 3A | Bank B 5B and 7B | Bank C 2C and 4C | Bank D 6D and 8D |
|---------------|---------------------|---------------------|---------------------|---------------------|
| 1 | X | X | - | - |
| 2 | X | X | X | X |

Storage

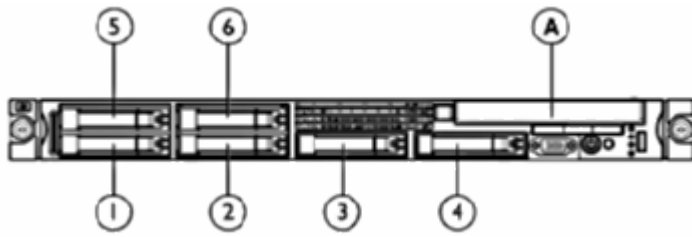

- 1-6 6 x SFF SAS Hot Pluggable Hard Drive Bays
- A Slimline Bay: Optional optical or floppy drive

Drive Support

| | Quantity Supported | Position Supported | Controller |
|--|--------------------|--------------------|----------------|
| Removable Media | | | |
| Slimline 1.44-MB Diskette Drive | Up to 1 | A | Integrated |
| Slimline 24x IDE CD-ROM Drive | Up to 1 | A | Integrated IDE |
| Slimline DVD-ROM Drive (8x/24x) Option Kit (Servers) | Up to 1 | A | Integrated IDE |
| Slimline DVD/CD-RW Combo Option Kit | Up to 1 | A | Integrated IDE |
| Slimline DVD-RW Drive (8X) Option Kit | Up to 1 | A | Integrated IDE |

Hard Drives

SAS Hard Drive

| | Quantity Supported | Position Supported | Controller |
|---------------------|--------------------|--------------------|--|
| 146GB 3G SAS 10K SP | 6 | 1-6 | HP Smart Array E200i/64MB Controller |
| 72GB 3G SAS 10K SP | | | HP Smart Array E500 Controller |
| 72GB 3G SAS 15K SP | | | HP Smart Array P400i/512MB BBWC Controller |
| 36GB 3G SAS 10K SP | | | HP Smart Array P400i/256MB Controller |
| 36GB 3G SAS 15K SP | | | HP Smart Array P600/256 BBWC Controller |
| | | | HP Smart Array P800/512 BBWC Controller |
| | | | Please see NOTES below regarding hard drive quantity supported by Smart Array Controller. |

NOTE: The Smart Array E200i Controller can support a maximum of 4 hard drives.

NOTE: The Smart Array P400i Controller can support a maximum of 6 hard drives. To support drives 5 and 6, the optional HP Mini SAS 4i 13.4 inch/0.35 m cable is required (PN 399546-B21).

NOTE: The Smart Array P600 Controller requires HP SAS 4i to Mini SAS 4i 31 inch/.79 meter cable (PN 411100-B21).

Serial-ATA (SATA) Hard Drive

| | Quantity Supported | Position Supported | Controller |
|----------------------|--------------------|--------------------|--|
| 120GB 1.5G SATA 5.4K | 6 | 1-6 | HP Smart Array E200i/64MB Controller |
| 60GB 1.5G SATA 5.4K | | | HP Smart Array E500 Controller |
| | | | HP Smart Array P400i/512MB BBWC Controller |
| | | | HP Smart Array P400i/256MB Controller |
| | | | HP Smart Array P600/256 BBWC Controller |
| | | | HP Smart Array P800/512 BBWC Controller |
| | | | Please see NOTES below regarding hard drive quantity supported by Smart Array Controller. |

NOTE: The Smart Array E200i Controller can support a maximum of 4 hard drives.

NOTE: The Smart Array P400i Controller can support a maximum of 6 hard drives. To support drives 5 and 6, the

optional HP Mini SAS 4i 13.4 inch/0.35 m cable is required (PN 399546-B21).

NOTE: The Smart Array P600 Controller requires HP SAS 4i to Mini SAS 4i 31 inch/.79 meter cable (PN 411100-B21).

External Storage

| | Quantity Supported | Position Supported | Host Controller or Adapter |
|-----------------------------------|---|--------------------|---|
| Modular Smart Array Family | Please see the Modular Smart Array 20 QuickSpecs to determine configuration requirements | External | Smart Array 6402/128 Controller Smart Array 6404/256 Controller Smart Array 642 Controller |
| Modular Smart Array Family | Please see the Modular Smart Array 30 QuickSpecs to determine configuration requirements. | External | Smart Array 6402/128 Controller Smart Array 6404/256 Controller Smart Array 642 Controller |
| Modular Smart Array 50 Enclosure | 2 | External | HP Smart Array P600/256 BBWC Controller |
| Modular Smart Array 500 G2 System | 1 | External | Smart Array 642 Controller (used as Host Bus Adapter) Please see the Modular Smart Array 500 G2 QuickSpecs for the latest list of supported HBAs: http://www.hp.com/go/msa500 |
| Modular Smart Array 1500 cs | Please see the Modular Smart Array 1500 cs QuickSpecs below to determine configuration requirements | External | Please see the Modular Smart Array 1500 cs QuickSpecs (URL below) for the latest list of supported HBAs |
| Modular Smart Array 1000 | Please see the Modular Smart Array 1000 QuickSpecs below to determine configuration requirements | External | Please see the Modular Smart Array 1000 QuickSpecs (URL below) for the latest list of supported HBAs |

Modular Smart Array 1000:

http://h18000.www1.hp.com/products/quickspecs/11033_div/11033_div.HTML (Worldwide)

Modular Smart Array 1500 cs: <http://www.hp.com/go/MSA1500cs>

Tape Drives, Tape Autoloaders, Tape Libraries & D2D Backup Systems

NOTE: For an up-to-date listing of the latest O/S Support details for each of the Tape Drives listed below, please see the following:

<http://h18000.www1.hp.com/products/quickspecs/Division/10233.html> (Worldwide)

NOTE: For an up-to-date listing of the latest O/S Support details for each of the Tape Autoloaders and Tape Libraries listed below, please see the following:

<http://h18000.www1.hp.com/products/quickspecs/Division/10809.html> (Worldwide)

NOTE: SAS Tape Drives: Connecting hard drive cage and SAS tape to the same SAS Controller using split cable (supplied with tape drive) deactivates 1 of the hard drive bays. Actual hard drive bay deactivated depends on where split cable plugs into SAS drive connector. Example: 3x SAS cable connector plugged into SAS drive connector (5-8) on the back of the hard drive cage would mean drive bay 8 is deactivated.

NOTE: For complete listing of tape drive offerings see

<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

For recommended tape drive offerings for this ProLiant server see the following:

| | Position Supported | Controller | Controller Part Number |
|---|--------------------|--|--|
| HP StorageWorks SCSI Tape Drives, External Ultrium 232 Ultrium 448 Ultrium 460 Ultrium 960 Ultrium 920 DAT 40 DAT 72 DLT VS160 SDLT 600 1U Rack-Mount Kit 3U Rack-Mount Kit | External | HP SC11Xe Host Bus Adapter | 412911-B21 |
| HP StorageWorks USB Tape Drives, External DAT 40 USB DAT 72 USB 1U Rack-Mount Kit | External | USB 2.0 Port | N/A |
| HP StorageWorks Tape Drives, SAS External Ultrium 448 SAS Ultrium 920 SAS 1U Rack-Mount Kit | External | HP SC44Ge Host Bus Adapter HP Smart Array P800/512 BBWC Controller Smart Array E500/256MB Controller NOTE: The following SAS Smart Array controllers require ROM Flash version 2.04 or higher for SAS tape support: HP Smart Array P400/256MB Controller HP Smart Array P400/512MB Controller NOTE: Please visit http://www.hp.com/go/connect for details about minimum SAS controller firmware version and SAS cabling requirements. | 416096-B21 381513-B21 435129-B21 405132-B21 411064-B21 |
| HP StorageWorks SCSI Tape Automation, External DAT 72x10 Autoloader 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096 MSL6000 | External | HP SC11Xe Host Bus Adapter HP U320e SCSI Host Bus Adapter NOTE: Only valid for MSL tape libraries. | 412911-B21 AH627A |
| HP StorageWorks SAS Tape Automation, External 1/8 G2 Autoloader MSL2024 MSL4048 MSL8096 | External | HP SC44Ge Host Bus Adapter NOTE: Please visit http://www.hp.com/go/connect for details about minimum SAS controller firmware version and SAS cabling requirements. | 416096-B21 |
| HP StorageWorks Tape Libraries, External MSL2024 (Ultrium 448, Ultrium 920 and 960-based) MSL4048 (Ultrium 448, Ultrium 920 and | External | Please consult the EBS connectivity matrix at http://www.hp.com/go/ebs for detailed connectivity information. | N/A |

960-based)
MSL6000 (Ultrium 960
and 460-based)
MSL6000 (SDLT 600-
based)

**HP StorageWorks
D2D Backup
Systems**
D2D110
D2D120

External Embedded Network Controller

N/A

[Overview](#) [Standard Features](#) [Models](#) [Configuration Information -
Factory Integrated Models \(North America only\)](#) [Options](#) [Memory](#) [Storage](#) [Power Specifications](#) [Technical Specifications](#)

Power Specifications

To review typical system power ratings use the Active Answers Power Calculator which is available via the online tool located at URL: <http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls>

To drill down to calculators:

- Click on: "ProLiant Servers"
- Click on the Server of interest. Example: DL360 G5
- Click on: "Power Calculator" link. (You may need to scroll down to see it)

[Overview](#) [Standard Features](#) [Models](#) [Configuration Information -
Factory Integrated Models \(North America only\)](#) [Options](#) [Memory](#) [Storage](#) [Power Specifications](#) [Technical Specifications](#)

Technical Specifications

| | | |
|--------------------|-------------------------------|---|
| System Unit | Dimensions (H x W x D) | 1.70 x 16.78 x 27.75 in (4.32 x 42.62 x 70.49 cm) |
| | Weight | <p>Maximum (six hard drives installed, two power supply, two processor) 37 lb (16.78 kg)</p> <p>No hard drives installed, one power supply, one processor 27.5 lb (12.47 kg)</p> |
| | Input Requirements | <p>Rated Input Voltage 100 to 240 VAC</p> <p>Rated Input Current 7.1 Amps (at 120VAC) to 3.5 Amps (240 at VAC)</p> <p>Rated Input Frequency 50 to 60 Hz</p> <p>Rated Input Power 852 W</p> |
| | BTU Rating | <p>2910 BTU/HR (at 120 VAC); 2870 (at 240 VAC)</p> <p>NOTE: The BTU rating listed is for the Rated Input Power of 852 W.</p> |
| | Power Specifications | <p>To review typical system power ratings use the Power Calculator which is available via the online tool located at URL: http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls</p> <p>To drill down to calculators:</p> <ul style="list-style-type: none"> - Click on: "ProLiant Servers" - Click on the Server of interest. Example: DL360 G5 - Click on: "Power Calculator" link. (You may need to scroll down to see it) |
| | Power Supply Output | Rated Steady-State 700 W |

| | | |
|--|---|--|
| Power (per power supply) | Power | |
| Temperature Range | Operating | 50° to 95°F (10° to 35°C) at sea level with an altitude derating of 1.0°C per every 1000 ft (300 m) above sea level to a maximum of 10,000 ft (3000 m), no direct sustained sunlight. Maximum rate of change is 10°C/Hr. |
| | Storage | -40° to 158°F (-40° to 70°C) – Maximum rate of change is 20°C/Hr. |
| Relative Humidity (non-condensing) | Operating | 10 to 90% relative humidity (Rh), 82.4°F (28°C) maximum wet bulb temperature |
| | Storage | 5 to 95% relative humidity (Rh), based upon a maximum temperature of 113° F (45° C). Altitude maximum for storage corresponds to a pressure minimum of 70 KPa. |
| Maximum Wet Bulb Temperature | 82.4°F (28°C) | |
| Acoustic Noise | Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 73.4°F (23°C) ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). | |
| | Idle: | |
| | L_{WAd} (BELS) | 6.6 |
| | L_{pAm} (dBA) | 50 |
| | Operating: | |
| | L_{WAd} (BELS) | 6.9 BELS |
| | L_{pAm} (dBA) | 53 dBA |

| | | |
|-------------------------------------|---|--|
| Smart Array E200i Controller | Disk Drive and Enclosure Interface | 3G SAS (Serial Attached SCSI) 1.5G SATA (Serial Advanced Technology Attachment) |
| | SAS Connectors | 2 internal (SFF8484) x4 wide port connectors |
| | Cache Memory Speed | DDR-1/266 MHz provides up to 4.2 GB/s maximum bandwidth. |
| | Server Interface | x4 2.5G PCIe provides 2GB/s maximum bandwidth. |
| | SAS Speed | x8 3G SAS provides 2.4GB/s maximum bandwidth. |
| | Cache Memory | 40-bit 64MB or 128MB cache: ECC protection, battery-backed, and transportable |
| | Logical Volumes Supported | Up to 32 logical volumes |
| | Maximum Volume Capacity | 3TB (6 x 500GB) |
| | Host Memory Addressing | 64-bit, supporting greater than 4GB server memory space |
| | RAID Support | RAID 5 (Distributed Data Guarding) requires 128MB BBWC option RAID 1, 1+0 (Striping & Mirroring) RAID 0 (Striping) |
| | Upgradeable Firmware | Upgradeable Firmware |

| | | |
|-------------------------------------|---|--|
| Smart Array P400i Controller | Disk Drive and Enclosure Interface | 3G SAS (Serial Attached SCSI) 1.5G SATA (Serial Advanced Technology Attachment) |
| | SAS Connectors | 2 internal (SFF8484) x4 wide port connectors |
| | Cache Memory Speed | DDR2-533MHz with 40 or 72-bit wide bus provides up to 4.2 GB/s maximum bandwidth. |

| | |
|---------------------------------------|--|
| Server Interface | x8 2.5G PCIe provides 2GB/s maximum bandwidth. |
| SAS Speed | x8 3G SAS provides 2.4GB/s maximum bandwidth. |
| Cache Memory | 40-bit 256MB cache (72-bit 512MB module upgrades available); ECC protection, battery-backed, and transportable |
| Logical Drives Supported | Up to 32 logical drives |
| Maximum Logical Drive Capacity | 3 TB (6 x 500GB) |
| Host Memory Addressing | 64-bit, supporting greater than 4GB server memory space |
| RAID Support | RAID 6 with ADG (Advanced Data Guarding) requires Battery Backed Write Cache Upgrade RAID 5 (Distributed Data Guarding) RAID 1+0 (Striping & Mirroring) RAID 0 (Striping) |
| Upgradeable Firmware | Upgradeable Firmware with recovery ROM feature |

| | | | | |
|--|------------------------------|---|---|--|
| Embedded NC373i Multifunction Gigabit Server Adapters | Network Interface | 10/100/1000-T | | |
| | Compatibility | EEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX | | |
| | Data Transfer Method | PCI Express, four lanes (x4) | | |
| | Network Transfer Rate | 10Base-T (Half-Duplex) | 10 Mb/s | |
| | | 10Base-T (Full-Duplex) | 20 Mb/s | |
| | | 100Base-TX (Half-Duplex) | 100 Mb/s | |
| | | 100Base-TX (Full-Duplex) | 200 Mb/s | |
| | | 1000Base-TX (Half and Full-Duplex) | 2000 Mb/s | |
| | Connector | RJ-45 | | |
| | Cable Support | 10Base-T | Categories 3, 4 or 5 UTP up to 328 ft (100 m) | |
| 10/100/1000 Base-TX | | Category 5 UTP up to 328 ft (100 m) | | |

© Copyright 2007 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.